







# Electrically Conductive Anti-Fatigue No. 786



Black (BK)

Electrically Conductive Anti-Fatigue effectively protects sensitive and dramatically reduces fatigue.

- » Vinyl Diamond-Plate or Smooth SBR surfaces drain static electricity from personnel
- » Protect sensitive equipment from damage or eliminate static annoyance
- » Nitricell® sponge base delivers 2X the resilience and 3X the life of typical sponges
- » Lay-flat design and up to 20% more standing area than look-alikes
- » Attached grounding snap

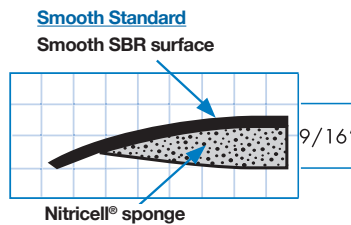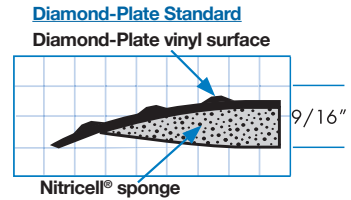

SPECIFICATIONS AND TESTING	Diamond-Plate	Smooth
<b>Compound</b>	Vinyl surface bonded to a Nitricell® sponge	Conductive SBR surface bonded to a Nitricell® sponge
<b>Edges</b>	Safety beveled	Safety beveled
<b>RTT (Resistance Top to Top)</b>	1 x 10 <sup>6</sup> to 8 x 10 <sup>6</sup> Ω	1 x 10 <sup>6</sup> Ω
<b>RTG (Resistance to Ground)</b>	1 x 10 <sup>6</sup> to 8 x 10 <sup>6</sup> Ω	1.7 x 10 <sup>6</sup> Ω
<b>Flammability (surface) per MVSS 302</b>	"A" Rating	"A" Rating
<b>Flammability (sponge) per MIL-P12420C</b>	Burned for < 5 seconds	Burned for < 5 seconds
<b>Coefficient of Friction per ASTM F1677</b>	Dry: .68	Dry: .68
<b>Compression Deflection per ASTM D575</b>	Deflection @35 psi, mm=8.43	Deflection @35 psi, mm=8.43
<b>Tabor Abrasion per Fed. Std. 191</b>	.1 Gram lost @ 1,000 cycles	.025 lost @ 1,000 cycles
<b>Warranty</b>	3 years	3 years

DIAMOND-PLATE STOCK ITEMS		
15/16" Thick	9/16" Thick	
Part Number	Part Number	Size
786.1516x2x3BK	786.916x2x3BK	2' x 3'
786.1516x3x5BK	786.916x3x5BK	3' x 5'
DIAMOND-PLATE NON-STOCK ITEMS		
15/16" Thick	9/16" Thick	
Part Number	Part Number	Size
786.1516x3x75BK	786.916x3x75BK	3' x 75'
786.1516x3CUTBK	786.916x3CUTBK	3' Cut up to 75'

Mats are available with a smooth (SM) or diamond-plate (DP) surface. Please specify when ordering.

**NOTE:** Mat must be grounded with a ground cord; workers must wear Heel Grounder or shoes with conductive soles.

