



Item # _____

Job _____

SECURITY UNITS

Features:


- **Safe Storage:** Protects valuable materials and sensitive items from loss or pilferage.
- **Microban® Antimicrobial Product Protection*:** Metroseal 3 and MetroMax Q models feature Microban Antimicrobial Product Protection, designed to stay “cleaner between cleanings.”
- **Ready View of Contents:** Heavy-gauge open wire construction keeps the entire contents of the truck visible at all times, making it easy to check inventory.
- **Adjustable, Optional Intermediate Shelves:** Patented, easily adjustable shelf designs — Super Adjustable Super Erecta, MetroMax Q, and qwikSLOT — allow flexibility to meet changing needs. Can be positioned in 1" (25 mm) increments along the entire height of post.
- **Patented, Ergonomic, 1/4-Turn Door Handle:** Makes opening and closing the unit easier than conventional security unit designs.
- **Double Door:** Each door opens 270 degrees and can be secured along the sides of the unit.
- **Time Saving Assembly:** Metro security units assemble quickly — right out of the box.
- **Shipped Knocked-Down:** Saves on freight costs. Easily assembled.

Choose from Stationary or Mobile Standard and Heavy-Duty Configurations:

- **Safe Transportation:** Mobile, security trucks provide the advantage of quick, protective transportation.
- **Easy Cleaning of Storage Areas:** Mobile units move easily from walls to allow thorough cleaning of floors and walls.
- **Mobile Units:** Available in Standard and Heavy-Duty models. Heavy-Duty units offer increased rigidity and durability for applications such as crossing thresholds.
- **Stationary Units:** Posts have leveling feet to compensate for uneven surfaces.



Super Erecta Shelf (HD Mobile) with optional Super Adjustable Super Erecta® Intermediate shelves

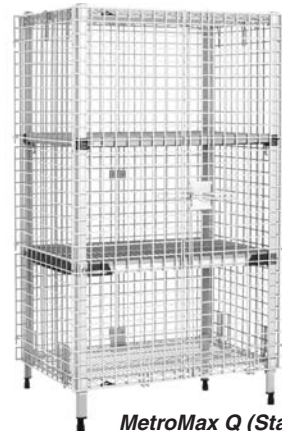

MetroMax Q (Stationary) with optional Intermediate shelves



quwikSLOT (Mobile) with optional Intermediate shelves



Handle (open position)



Handle (closed position)

*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



Distributed by:
Custom Equipment Company
866-333-0728
sales@customMhs.com





Specifications

Super Erecta Shelf Stationary Security

| Model No. Chrome | Model No. Metroseal 3 | Model No. Stainless Steel | Width | | Length | | Height | | Fits Shelf | | Approx. Pkd. Wt. | |
|---------------------|--------------------------|------------------------------|--------------------------------|------|--------------------------------|------|----------------------------------|------|------------|----------|------------------|------|
| | | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SEC33C | SEC33K3 | SEC33S | 21 ¹ / ₂ | 546 | 38 ¹ / ₂ | 980 | 66 ¹³ / ₁₆ | 1695 | 18x36 | 457x914 | 138 | 63 |
| SEC35C | SEC35K3 | SEC35S | 21 ¹ / ₂ | 546 | 50 ¹ / ₂ | 1295 | 66 ¹³ / ₁₆ | 1695 | 18x48 | 457x1219 | 157 | 71 |
| SEC53C | SEC53K3 | SEC53S | 27 ¹ / ₄ | 692 | 38 ¹ / ₂ | 980 | 66 ¹³ / ₁₆ | 1695 | 24x36 | 610x914 | 154 | 70 |
| SEC55C | SEC55K3 | SEC55S | 27 ¹ / ₄ | 692 | 50 ¹ / ₂ | 1295 | 66 ¹³ / ₁₆ | 1695 | 24x48 | 610x1219 | 174 | 79 |
| SEC56C | SEC56K3 | SEC56S | 27 ¹ / ₄ | 692 | 62 ¹ / ₂ | 1587 | 66 ¹³ / ₁₆ | 1695 | 24x60 | 610x1524 | 195 | 89 |
| SEC63C | | SEC63S | 33 ¹ / ₂ | 851 | 38 ¹ / ₂ | 980 | 66 ¹³ / ₁₆ | 1695 | 30x36 | 760x914 | 167 | 76 |
| SEC65C | | SEC65S | 33 ¹ / ₂ | 851 | 50 ¹ / ₂ | 1295 | 66 ¹³ / ₁₆ | 1695 | 30x48 | 760x1219 | 193 | 88 |
| SEC66C | | SEC66S | 33 ¹ / ₂ | 851 | 62 ¹ / ₂ | 1587 | 66 ¹³ / ₁₆ | 1695 | 30x60 | 760x1524 | 215 | 98 |

Super Erecta Shelf Mobile Security

Standard-Duty Stem Caster Models: feature 5" (127mm) swivel casters. Please note model numbers for specific caster types.

| Model No. Chrome | Model No. Metroseal 3 | Caster Type | Width | | Length | | Height | | Fits Shelf | | Approx. Pkd. Wt. | |
|---------------------|--------------------------|------------------|--------------------------------|------|--------------------------------|------|--------------------------------|------|------------|----------|------------------|------|
| | | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SEC33EC | SEC33EK3 | (2) 5MP/(2) 5MPB | 21 ¹ / ₂ | 546 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 18x36 | 457x914 | 146 | 66 |
| SEC35EC | SEC35EK3 | (2) 5MP/(2) 5MPB | 21 ¹ / ₂ | 546 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 18x48 | 457x1219 | 165 | 75 |
| SEC53DC | SEC53DK3 | (4) 5MP | 27 ¹ / ₄ | 692 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 24x36 | 610x914 | 162 | 74 |
| SEC55DC | SEC55DK3 | (4) 5MP | 27 ¹ / ₄ | 692 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 24x48 | 610x1219 | 182 | 83 |
| SEC56DC | SEC56DK3 | (4) 5MP | 27 ¹ / ₄ | 692 | 65 | 1651 | 68 ¹ / ₂ | 1740 | 24x60 | 610x1524 | 203 | 92 |
| SEC53EC | SEC53EK3 | (2) 5MP/5MPB | 27 ¹ / ₄ | 692 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 24x36 | 610x914 | 162 | 74 |
| SEC55EC | SEC55EK3 | (2) 5MP/5MPB | 27 ¹ / ₄ | 692 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 24x48 | 610x1219 | 182 | 83 |
| SEC56EC | SEC56EK3 | (2) 5MP/5MPB | 27 ¹ / ₄ | 692 | 65 | 1651 | 68 ¹ / ₂ | 1740 | 24x60 | 610x1524 | 203 | 92 |
| | SEC53VK3 | (2) 5PC/5PCB | 27 ¹ / ₄ | 692 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 24x36 | 610x914 | 162 | 74 |
| | SEC55VK3 | (2) 5PC/5PCB | 27 ¹ / ₄ | 692 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 24x48 | 610x1219 | 182 | 83 |
| | SEC56VK3 | (2) 5PC/5PCB | 27 ¹ / ₄ | 692 | 65 | 1651 | 68 ¹ / ₂ | 1740 | 24x60 | 610x1524 | 203 | 92 |
| SEC63EC | | (2) 5MP/(2) 5MPB | 33 ¹ / ₂ | 851 | 40 ³ / ₄ | 1035 | 68 ¹ / ₂ | 1740 | 30x36 | 760x914 | 175 | 80 |
| SEC65EC | | (2) 5MP/(2) 5MPB | 33 ¹ / ₂ | 851 | 52 ³ / ₄ | 1340 | 68 ¹ / ₂ | 1740 | 30x48 | 760x1219 | 202 | 92 |
| SEC66EC | | (2) 5MP/(2) 5MPB | 33 ¹ / ₂ | 851 | 65 | 1651 | 68 ¹ / ₂ | 1740 | 30x60 | 760x1524 | 223 | 101 |

Casters: 5MP and 5MPB (with locking brake) feature a polyurethane tread.

5PC and 5PCB (with locking brake) castes feature a polymer horn and resist rusting. They are recommended for high-moisture environments.

Heavy-Duty Models: feature aluminum dollies with wraparound bumpers and 5" (127mm) diameter casters.

| Model No. Chrome | Model No. Metroseal 3 | Caster Type | Width | | Length | | Height | | Fits Shelf | | Approx. Pkd. Wt. | |
|---------------------|--------------------------|--------------|---------------------------------|------|--------------------------------|------|--------------------------------|------|------------|----------|------------------|------|
| | | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SEC53LC | SEC53LK3 | (2) B5P/B5PB | 28 ¹ / ₁₆ | 713 | 38 ¹ / ₂ | 980 | 68 ¹ / ₂ | 1740 | 24x36 | 610x914 | 187 | 85 |
| SEC55LC | SEC55LK3 | (2) B5P/B5PB | 28 ¹ / ₁₆ | 713 | 50 ¹ / ₂ | 1285 | 68 ¹ / ₂ | 1740 | 24x48 | 610x1219 | 210 | 95 |
| SEC56LC | SEC56LK3 | (2) B5P/B5PB | 28 ¹ / ₁₆ | 713 | 63 ¹ / ₈ | 1600 | 68 ¹ / ₂ | 1740 | 24x60 | 610x1524 | 235 | 107 |

Stainless Steel: Casters must be ordered separately on "-SD" models. Dollies and casters must be ordered separately on "-HD" models.

| Model No. | Description | Width | | Length | | Height | | Fits Shelf | | Approx. Pkd. Wt. | |
|-----------|---------------|---------------------------------|------|--------------------------------|------|--------|------|------------|----------|------------------|------|
| | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| SEC33S-SD | Standard Duty | 21 ¹ / ₂ | 546 | 40 ³ / ₄ | 1035 | 62 | 1575 | 18x36 | 457x914 | 138 | 63 |
| SEC35S-SD | Standard Duty | 21 ¹ / ₂ | 546 | 52 ³ / ₄ | 1340 | 62 | 1575 | 18x48 | 457x1219 | 157 | 71 |
| SEC53S-SD | Standard Duty | 27 ¹ / ₄ | 692 | 40 ³ / ₄ | 1035 | 62 | 1575 | 24x36 | 610x914 | 154 | 70 |
| SEC55S-SD | Standard Duty | 27 ¹ / ₄ | 692 | 52 ³ / ₄ | 1340 | 62 | 1575 | 24x48 | 610x1219 | 174 | 79 |
| SEC56S-SD | Standard Duty | 27 ¹ / ₄ | 692 | 65 | 1651 | 62 | 1575 | 24x60 | 610x1524 | 195 | 89 |
| SEC63S-SD | Standard Duty | 33 ¹ / ₂ | 851 | 40 ³ / ₄ | 1035 | 62 | 1575 | 30x36 | 760x914 | 167 | 76 |
| SEC65S-SD | Standard Duty | 33 ¹ / ₂ | 851 | 52 ³ / ₄ | 1340 | 62 | 1575 | 30x48 | 760x1219 | 193 | 88 |
| SEC66S-SD | Standard Duty | 33 ¹ / ₂ | 851 | 65 | 1651 | 62 | 1575 | 30x60 | 760x1524 | 215 | 98 |
| SEC53S-HD | Heavy Duty | 28 ¹ / ₁₆ | 713 | 38 ¹ / ₂ | 980 | 62 | 1575 | 24x36 | 610x914 | 154 | 70 |
| SEC55S-HD | Heavy Duty | 28 ¹ / ₁₆ | 713 | 50 ¹ / ₂ | 1285 | 62 | 1575 | 24x48 | 610x1219 | 174 | 79 |
| SEC56S-HD | Heavy Duty | 28 ¹ / ₁₆ | 713 | 63 ¹ / ₈ | 1600 | 62 | 1575 | 24x60 | 610x1524 | 195 | 89 |

NOTE: Given height is for unit without dolly or casters (depending on model chosen). For approximate overall unit height add chosen caster diameter plus 1" (25mm).

CAUTION: Large casters can create a tipping hazard. On 18" (457mm) security units, do not use casters larger than 5" (127mm) in diameter.

Intermediate Super Adjustable Shelves for Super Erecta Shelf Security Units

| Model No. Chrome | Model No. Metroseal 3 | Model No. Stainless Steel | Width | | Length | | Approx. Pkd. Wt. | |
|---------------------|--------------------------|------------------------------|-------|------|--------|------|--------------------------------|------|
| | | | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| A1836NC | A1836NK3 | A1836NS | 18 | 457 | 36 | 914 | 9 ¹ / ₂ | 4.3 |
| A1848NC | A1848NK3 | A1848NS | 18 | 457 | 48 | 1219 | 12 | 5.4 |
| A2436NC | A2436NK3 | A2436NS | 24 | 610 | 36 | 914 | 13 | 6 |
| A2448NC | A2448NK3 | A2448NS | 24 | 610 | 48 | 1219 | 16 | 7 |
| A2460NC | A2460NK3 | A2460NS | 24 | 610 | 60 | 1524 | 21 | 9.5 |
| A3036NC | | A3036NS | 30 | 760 | 36 | 914 | 15 | 6.8 |
| A3048NC | | A3048NS | 30 | 760 | 48 | 1219 | 21 | 9.5 |
| A3060NC | | A3060NS | 30 | 760 | 60 | 1524 | 26 ¹ / ₂ | 11.8 |

NOTE: Standard Super Erecta shelves can also be used as intermediate shelves. Refer to catalog sheet 10.01 for more information.