
OPEN END STEEL DUMPING HOPPER - HOP-OE

APPROX WEIGHT: 609.64 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

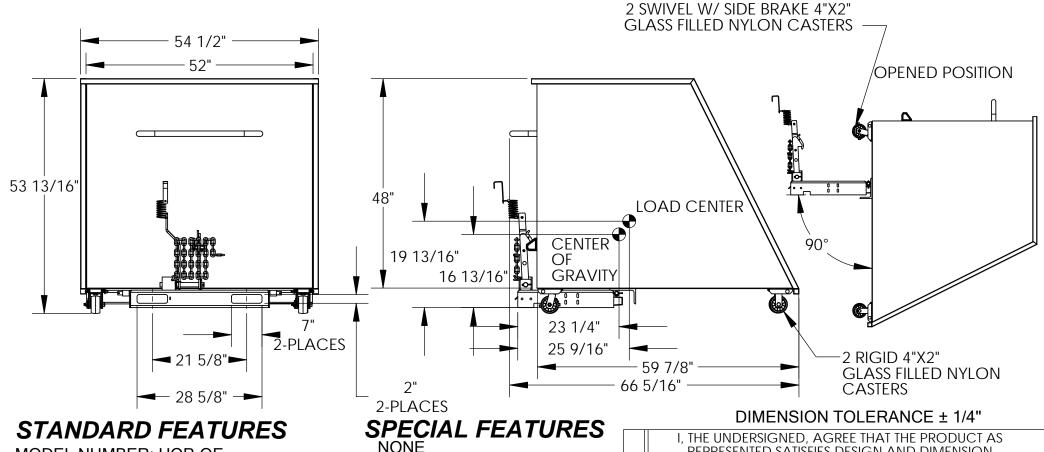

MODEL NUMBER: HOP-OE

CAPACITY: 2000 LBS. **OVERALL WIDTH: 54 1/2"**

OVERALL LENGTH: 66 5/16" OVERALL HEIGHT: 53 13/16"

USABLE SIZE: W52" X L59 7/8" X H48"

RELEASE CABLE LENGTH IS AT LEAST: 48"

SAFTY CHAIN LENGTH: 56"

2- RIGID 4" X 2" GLASS FILLED NYLON CASTERS IN FRONT

2- SWIVEL 4" X 2" GLASS FILLD NYLON CASTER W/ SI

NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDLINES. DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

DE BRAKE				OF SIGNED APPROVAL DRAWING				
	FOR INTERNAL USE ONLY PROJECT SIGN OFF SALES			BUTOR'S NAME:	TUDIN		P.O.# X	
			VESTIL IVIATIONAL CONTINUE			W.O.# X	_	
	ENG.		DRAW	^{'N BY:} W.STALEY	DATE: 3/2	1/08	SALES: X	_
	FAB.			ENCE: X		SCALE: 1:22		
	POWER		QUOTE	ED LEAD TIME: χ	QUOTE # X		37-007-033	

I. THE UNDERSIGNED. AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION Ρ COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE Ρ AND LOCAL REGULATIONS AND STANDARDS. R ALL SPECIAL UNITS ARE NON-RETURNABLE 0 [] As drawn [] As marked

Signed