

Panel & Pipe Trucks

Models PC, TP, UP - Transporters for panels, or pipes & bars

2,000 LB CAP.




Model PC Shown

4,000 LB CAP.* (*2,400 lb with R8 - 3,800 lb with U8)



Model TP Shown

4,000 LB CAP.* (*2,400 lb with R8 - 3,800 lb with U8)

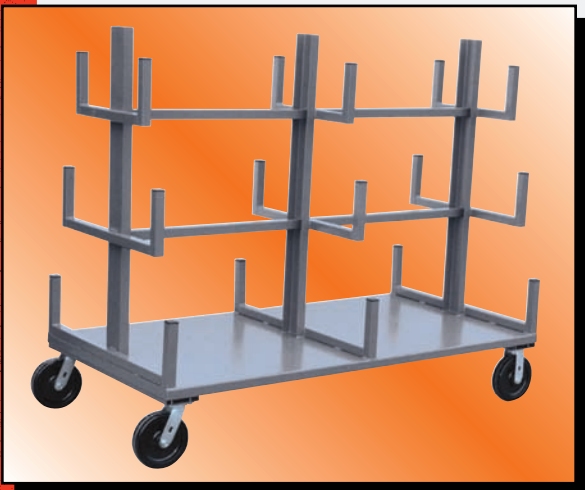

Model UP Shown

Product Features:

- All welded construction (except casters).
- Durable 12 gauge steel platform with under bracing, and 12 gauge caster mounts for long lasting use.
- Bolt on casters, 2 swivel & 2 rigid, for easy replacement.
- Powder coated gray finish.

Model PC:

- Angle "A" frame 48" above deck, angle 1-1/2" by 3/16" thickness.
- Usable deck space each side of "A" frame: 24" width - 6", 30" width - 9", 36" width - 12".
- 1-1/2" platform lips up on sides for retention and down (flush) on ends.
- Overall height - 57", (59" with 8" casters).

Models TP & UP:

- 4" channel uprights, 1-1/2" square tube arms.
- 3 load levels.
- Platform height - 11".
- Usable arm spacing (horizontal) - each side:
 - Top - 6-1/2"
 - Middle - 10-1/2"
 - Bottom - 14-1/2"
- Overall height - 59".
- Application: Three levels of horizontal storage. (Model UP for flexible material)

Options:

- 2 wheel brakes on swivel casters - Code B6, B8 or BN
- All swivel casters - Code AS (Model PC only)
- Floor lock - Code F6 or F8

Model PC - "A" Frame Panel Truck

WxL (in)	6" Casters Models				8" Semi Pneumatic	
	Phenolic	Rubber	Urethane	Wgt. (lbs)	Models	Wgt. (lbs)
24 x 36	PC236-P6	PC236-R6	PC236-U6	140	PC236-Z8	152
48	PC248-P6	PC248-R6	PC248-U6	164	PC248-Z8	176
60	PC260-P6	PC260-R6	PC260-U6	186	PC260-Z8	198
72	PC272-P6	PC272-R6	PC272-U6	210	PC272-Z8	222
30 x 48	PC348-P6	PC348-R6	PC348-U6	176	PC348-Z8	188
60	PC360-P6	PC360-R6	PC360-U6	202	PC360-Z8	214
72	PC372-P6	PC372-R6	PC372-U6	226	PC372-Z8	238
36 x 48	PC448-P6	PC448-R6	PC448-U6	190	PC448-Z8	202
60	PC460-P6	PC460-R6	PC460-U6	218	PC460-Z8	230
72	PC472-P6	PC472-R6	PC472-U6	246	PC472-Z8	258

Model TP - Bar & Pipe Truck - Twin Support

WxL (in)	8" Casters Models				Wgt. (lbs)
	Phenolic	Rubber	Urethane	Steel	
36 x 48	TP448-P8	TP448-R8	TP448-U8	TP448-L8	226
60	TP460-P8	TP460-R8	TP460-U8	TP460-L8	248
72	TP472-P8	TP472-R8	TP472-U8	TP472-L8	270

Model UP - Bar & Pipe Truck - Triple Support

WxL (in)	8" Casters Models				Wgt. (lbs)
	Phenolic	Rubber	Urethane	Steel	
36 x 48	UP448-P8	UP448-R8	UP448-U8	UP448-L8	284
60	UP460-P8	UP460-R8	UP460-U8	UP460-L8	300
72	UP472-P8	UP472-R8	UP472-U8	UP472-L8	316

Casters For Steel Carts

Jamco carts offer unique twin-hole pattern caster mounts that will accept casters with 1-3/4" x 3" & 3" x 3" bolt hole patterns (unless otherwise noted).

Wheel Characteristics

- Phenolic - Best rollability, high strength, hardest material.
- Rubber - Best if floor has debris, quieter roll.
- Polyurethane - Best if floor conditions vary, non-marking.
- Thermorubber - Gray non-marking, soft rubber for quietest roll and best floor protection.
- Steel (semi) - High shock and impact resistant.
- Full Pneumatic - Absorbs shock and vibration, quiet movement, best for uneven floors or transporting over ridges in floors or mezzazines. Requires periodic maintenance.
- Semi Pneumatic - Same as full pneumatic without maintenance of air.

Brakes

- Wing Brakes (Toe) - On swivel casters only, must be ordered with caster.
- Floor Lock - Mount is welded in place, makes models not returnable.

4 Series

Code	Size (in)	Bolt Hole Pattern (in)	Wheel Material	Bearing	Capacity (set of 4)	Floor Locks	Brake Locks
U4	4 x 1-1/4	1-3/4 x 3	Polyurethane	Ball	1,200 lbs	N/A	B4
T4	4 x 1-1/4	1-3/4 x 3	Thermorubber	Ball	800 lbs	N/A	B4

5 Series

Code	Size (in)	Bolt Hole Pattern (in)	Wheel Material	Bearing	Capacity (set of 4)	Floor Locks	Brake Locks
U5	5 x 1-1/4	1-3/4 x 3	Polyurethane	Ball	1,200 lbs	F5	B5
T5	5 x 1-1/4	1-3/4 x 3	Thermorubber	Ball	800 lbs	F5	B5
L5	5 x 1-1/4	1-3/4 x 3	Steel (semi)	Plain	1,200 lbs	F5	B5

7 Series

Code	Size (in)	Bolt Hole Pattern (in)	Wheel Material	Bearing	Capacity (set of 4)	Floor Locks	Brake Locks
P7	5 x 2	3 x 3	Phenolic	Roller	4,000 lbs	F7	B7
R7	5 x 2	3 x 3	Rubber (Mold-on)	Roller	1,800 lbs	F7	B7
U7	5 x 2	3 x 3	Polyurethane	Roller	3,000 lbs	F7	B7
T7	5 x 2	3 x 3	Thermorubber	Roller	2,000 lbs	F7	B7
L7	5 x 2	3 x 3	Steel (semi)	Roller	4,000 lbs	F7	B7

6 Series

Code	Size (in)	Bolt Hole Pattern (in)	Wheel Material	Bearing	Capacity (set of 4)	Floor Locks	Brake Locks
P6	6 x 2	3 x 3	Phenolic	Roller	4,800 lbs	F6	B6
R6	6 x 2	3 x 3	Rubber (Mold-on)	Roller	2,000 lbs	F6	B6
U6	6 x 2	3 x 3	Polyurethane	Roller	3,600 lbs	F6	B6
T6	6 x 2	3 x 3	Thermorubber	Roller	2,200 lbs	F6	B6
L6	6 x 2	3 x 3	Steel (semi)	Roller	4,000 lbs	F6	B6

8 Series

Code	Size (in)	Bolt Hole Pattern (in)	Wheel Material	Bearing	Capacity (set of 4)	Floor Locks	Brake Locks
P8	8 x 2	3 x 3	Phenolic	Roller	4,800 lbs	F8	B8
R8	8 x 2	3 x 3	Rubber (Mold-on)	Roller	2,400 lbs	F8	B8
U8	8 x 2	3 x 3	Polyurethane	Roller	3,800 lbs	F8	B8
T8	8 x 2	3 x 3	Thermorubber	Roller	2,400 lbs	F8	B8
L8	8 x 2	3 x 3	Steel (semi)	Roller	4,000 lbs	F8	B8

N Series

Code	Size (in)	Bolt Hole Pattern (in)	Wheel Material	Bearing	Capacity (set of 4)	Floor Locks	Brake Locks
N8	8 x 3	3 x 3	Full Pneumatic	Roller	1,200 lbs	FN	BN
N1	12 x 4	3 x 3	Full Pneumatic	Ball	2,200 lbs	N/A	N/A
Z8	8 x 3	3 x 3	Semi Pneumatic	Ball	2,000 lbs	F8	BN

Mill Duty Series

Code	Size (in)	Bolt Hole Pattern (in)	Wheel Material	Bearing	Capacity (set of 4)	Floor Locks	Brake Locks
MP	8 x 2-1/2	3 x 3	Phenolic	Ball	7,000 lbs	ML	BM
MS	8 x 2-1/2	3 x 3	Steel	Ball	7,000 lbs	ML	BM

Floor Lock



4 Series



Urethane Thermorubber

5 Series



Urethane Thermorubber



Steel
7, 6, & 8 Series




Phenolic Mold On Rubber



Urethane Thermorubber



Steel
N Series



Full Pneumatic Semi Pneumatic

Mill Duty Series



Phenolic Steel