

Drum Trucks - Steel



Steel framed EZY-Rol™ Automatic Drum Trucks are the answer to safe and effective manual transport and handling of drum inventories. All drum trucks feature Valley Craft's exclusive EZY-Rol™ design and spring-loaded standard chime hook so the operator never has to touch the drum. Choice of 2-wheel or 4-wheel models. Shoes adjust to handle 30- and 55-gal. drums up to 1,000 lbs. Available with optional hand brakes for added safety. Replaceable wheels, shoes and axles available. Four additional chime hooks and three wheel options available.



F81735A7
Steel Solid Rubber

2-Wheel Drum Trucks

| Brakes | With Brakes | | No Brakes | | |
|---------------|--------------------------|------------------------------|-----------------|--------------------|---------------|
| Part Number | F82025A4 | F82150A1 | F81600A9 | F81735A7 | F81895A3 |
| Name | Steel Pneumatic w/Brakes | Steel Solid Rubber w/ Brakes | Steel Pneumatic | Steel Solid Rubber | Steel Mold-On |
| Load Capacity | 1,000 lbs | 1,000 lbs | 1,000 lbs | 1,000 lbs | 1,000 lbs |
| Weight | 78 lbs | 78 lbs | 67 lbs | 70 lbs | 66 lbs |
| Width | 26" | 24" | 26" | 24" | 24" |
| Depth | 19½" | 19½" | 19½" | 19½" | 19½" |
| Height | 58.9" | 58.9" | 58.9" | 58.9" | 58.9" |
| Chime Hook | Standard | Standard | Standard | Standard | Standard |



F82895A1
Steel Solid Rubber

4-Wheel Drum Trucks

For More Information: 866-333-0728

| Brakes | With Brakes | | No Brakes | | |
|---------------|--------------------------|------------------------------|-----------------|--------------------|---------------|
| Part Number | F83160A7 | F83450A6 | F82375A0 | F82895A1 | F82845A2 |
| Name | Steel Pneumatic w/Brakes | Steel Solid Rubber w/ Brakes | Steel Pneumatic | Steel Solid Rubber | Steel Mold-On |
| Load Capacity | 1,000 lbs | 1,000 lbs | 1,000 lbs | 1,000 lbs | 1,000 lbs |
| Weight | 84 lbs | 80 lbs | 75 lbs | 73 lbs | 82 lbs |
| Width | 26" | 24" | 26" | 24" | 24" |
| Depth | 20½" | 20½" | 20½" | 20½" | 20½" |
| Height | 58.9" | 58.9" | 58.9" | 58.9" | 58.9" |
| Chime Hook | Standard | Standard | Standard | Standard | Standard |

Drum Truck Chime Hooks

All models come with the standard chime hook - if you prefer a different chime hook please indicate which chime hook you would like by adding the corresponding letter suffix to the standard unit part number.

| | | L | F | C | P |
|---------------|--|---|--|---|--|
| Function | S | F P S | F | F P S | P |
| Part Number | Comes Standard | "L" as suffix | "F" as suffix | "C" as suffix | "P" as suffix |
| Name | Standard Chime Hook | Locking Cover Chime Hook | Fiber Drum Chime Hook | Cable Hoop Chime Hook | Plastic Drum Chime Hook |
| Load Capacity | 800 lbs | 800 lbs | 800 lbs | 800 lbs | 800 lbs |
| Weight | 8 lbs | 8 lbs | 8 lbs | 8 lbs | 8 lbs |
| Features | Automatically engages drum. Comes standard on automatic drum trucks. | Handles drums with Locking cover. May be used on aluminum truck and handles standard drums. | Reaches an extra inch to hook rim of fiber drums. Also handles standard drums. | Hook Cable on standard chime hook wraps around drums without a chime. | Hook Drops over bung hole projection on standard drums. May be used on aluminum truck. |



Pneumatic Tire
12 x 3½"
Disassembles to replace tire and tube.



Solid Rubber Tire
10 x 2½"
Standard tire on all drum trucks.



Molded-On Tire
10 x 2½"
Brakes not available with this wheel.



Our unique braking system features a simple hand lever that operates brake bands equally on both load-carrying wheels, providing a safer and more efficient way to move heavy loads. These brakes give the operator complete control on ramps and inclines, and keep the wheels stationary while breaking over loads. Not available with molded-on solid rubber tires.



HEAVY DUTY

Drum Trucks - Powered



Heavy Duty Powered Drum Trucks are designed for safe navigation of heavy loads in tight quarters and on inclines or uneven terrain. Perfect for places where traditional powered machines will not work due to space restriction. Features include a rugged 24V DC differential drive motor, full function forward and reverse travel with reverse audible warning, built-in 18 AH battery with charging/monitor system, and exclusive easy grip hand brake. Shoes adjust to handle 30- and 55-gal. drums up to 800 lbs. Includes our standard spring-loaded drum chime hook - four optional chime hooks available. Speed settings include 1.4MPH (walk) or 0.5MPH (crawl) speeds. Approved for use on a 5° incline.



F89503
Powered Drum Truck
Solid Rubber

Solid Rubber Wheels

| | |
|---------------|--|
| Part Number | F89503 |
| Name | Powered Drum Truck w/Solid Rubber Wheels |
| Load Capacity | 800 lbs |
| Weight | 150 lbs |
| Width | 24½" |
| Depth | 20½" |
| Height | 60" |
| Chime Hook | Standard |



Solid Rubber Tire
10 x 2½"
Standard tire on
all drum trucks.



F89484
Powered Drum Truck
Pneumatic

Pneumatic Wheels

| | |
|---------------|---------------------------------------|
| Part Number | F89484 |
| Name | Powered Drum Truck w/Pneumatic Wheels |
| Load Capacity | 800 lbs |
| Weight | 160 lbs |
| Width | 26" |
| Depth | 20½" |
| Height | 62" |
| Chime Hook | Standard |



Pneumatic Tire
12 x 3½"
Disassembles to
replace tire and
tube.

Drum Truck Chime Hooks

All models come with the standard chime hook - if you prefer a different chime hook please indicate which chime hook you would like by adding the corresponding letter suffix to the standard unit part number.

| | | L | F | C | P |
|---------------|--|---|--|---|--|
| Function | S | F P S | F | F P S | P |
| Part Number | Comes Standard | "L" as suffix | "F" as suffix | "C" as suffix | "P" as suffix |
| Name | Standard Chime Hook | Locking Cover Chime Hook | Fiber Drum Chime Hook | Cable Hoop Chime Hook | Plastic Drum Chime Hook |
| Load Capacity | 800 lbs | 800 lbs | 800 lbs | 800 lbs | 800 lbs |
| Weight | 8 lbs | 8 lbs | 8 lbs | 8 lbs | 8 lbs |
| Features | Automatically engages drum. Comes standard on automatic drum trucks. | Handles drums with Locking cover. May be used on aluminum truck and handles standard drums. | Reaches an extra inch to hook rim of fiber drums. Also handles standard drums. | Hook Cable on standard chime hook wraps around drums without a chime. | Hook Drops over bung hole projection on standard drums. May be used on aluminum truck. |

Pallet Trucks

FOUR WHEEL

4-Wheel Deep Frame Bag & Box Hand Trucks feature a set of 6" swivel casters mounted on extended skid rails, to better assist the operator in balancing the load. The rear wheels fix the angle at which the frame is balanced, so these trucks are recommended for use on flat surfaces or inclines of no more than 10 degrees and with loads that are not extremely deep in relation to the height. Choose from 14-gauge, 1 1/8" O.D. steel tubing frame with form-fitted joints, or 1 5/16" spark-resistant aluminum frame. Some models offer hand brakes for added safety. 1000-lb. load capacity.

4-Wheel, Deep Frame, Steel Models with shoe

| Model | Frame H x W | Shoe | Tires |
|----------|--------------|--------|--------------------------|
| F84808A3 | 54 x 14 1/2" | 10x19" | Solid Rubber |
| F84825A2 | 54 x 14 1/2" | 10x19" | Solid Rubber with Brakes |

4-Wheel, Deep Frame, Aluminum Models with shoe

| Model | Frame H x W | Shoe | Tires |
|----------|--------------|--------|--------------|
| F84800A1 | 54 x 14 1/2" | 10x19" | Solid Rubber |



F84808A3
4-Wheel Steel Deep Frame with Solid Rubber Tires

2-Wheel Deep Frame Pallet Hand Trucks have a 6" longer frame and 19" skid rails to prevent truck from falling back on operator. Features 14-ga., 1 1/8" O.D. steel tubing with form-fitted joints and solid welds, or 1 5/16" spark-resistant aluminum tubing. Some models offer hand brakes for added safety. 1000-lb. load capacity.

2-Wheel, Deep Frame, Steel Models with forks

| Model | Frame H x W | Shoe | Tires |
|----------|--------------|---------|--------------------------|
| F84907A3 | 54 x 14 1/2" | 13 3/4" | Pneumatic |
| F84940A2 | 54 x 14 1/2" | 13 3/4" | Pneumatic with Brakes |
| F84910A8 | 54 x 14 1/2" | 13 3/4" | Solid Rubber |
| F84944A8 | 54 x 14 1/2" | 13 3/4" | Solid Rubber with Brakes |
| F84911A7 | 54 x 14 1/2" | 13 3/4" | Mold-On Rubber |
| F84813A6 | 54 x 14 1/2" | 13 3/4" | Solid Rubber |

2-Wheel, Deep Frame, Aluminum Models with forks

| Model | Frame H x W | Shoe | Tires |
|----------|--------------|---------|--------------|
| F84906A4 | 54 x 14 1/2" | 13 3/4" | Pneumatic |
| F84908A2 | 54 x 14 1/2" | 13 3/4" | Solid Rubber |



F84907A3
2-Wheel Steel Deep Frame with Pneumatic Tires



Drum, Pallet, Box Lift

VERSA LIFT, POWER DRIVE





Multi-purpose positioner that rolls easily on (2) 3" rigid and (1) 12" swivel poly wheels. Efficiently performs duties and is extremely versatile. 78" and 90" models available, choice of Straddle or Counter-Weighted styles. Optional floor lock available. Unit does not come with an attachment - choose from options (purchased separately) shown below: Drum Grip, Drum Claw, Drum Rotator, Pallet Forks, Drum Forks, Drum Tilter, and Steel Platform. Includes two batteries and 120V AC charger.

| | |
|-----------------|-------------|
| Part Number | F80136A9 |
| Name | 78" Counter |
| Load Capacity | 1,000 lbs |
| Weight | 1,150 lbs |
| Width | 32" |
| Length | 49" |
| Height | 78" |
| Drive Speed | 1 - 2.5 MPH |
| Lift Speed | 17 FPM |
| Max lift travel | 58" |
| Turning Radius | 71" |
| Drum Diameter | 14 - 24" |
| Rotate Speed | 6 RPM |
| Jaw Size | 9 x 15" |

F80135A8
90" Counter Versa Lift



Counter Weight

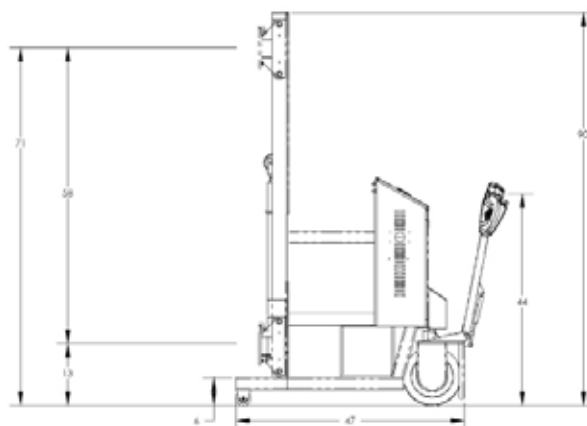

Lift Attachments

| Function | | | | | | | |
|---------------|--|--|--|---|--|---|---|
| Part Number | F86146A9 | F88560A2 | F88562A0 | F89409A5 | F89406A8 | F89418A4 | F89408A6 |
| Name | Drum Grip | Drum Claw | Drum Rotator | Drum Tilter | Pallet Forks | Steel Platform | Drum Forks |
| Load Capacity | 800 lbs | 800 lbs | 800 lbs | 800 lbs | 800 lbs | 800 lbs | 800 lbs |
| Weight | 108 lbs | 56 lbs | 122 lbs | 66 lbs | 43 lbs | 24 lbs | 87 lbs |
| Drum Diameter | 18 - 23" | 18 - 28" | 14 - 24" | 14 - 24" | | | |
| Fork Length | | | | | 24" | | 24" |
| Platform Size | | | | | | 24 x 24" | |
| Features | Spring & cam-actuated to automatically grip as pressure against drum forces jaws down. | Beak-style grab that grasps the rim of virtually any kind of drum. Attaches without the use of straps. | Includes nylon belts, ratchet tighteners and rubber-coated arms. | Rotates 120°. Hand crank-operated tilter includes ratchets with nylon straps. | Move, elevate and stack pallets up to 24" deep. Useful as compact fork truck in congested areas and narrow aisles. | Use with Pallet Forks (F89406A8) to make into a platform lift for work positioning and heavy items. | Handle horizontally stacked drums for a fast, efficient way to lift drums in and out of stacking racks. |



Professional Grade Quality....Built to Last....Made in the U.S.A.