
Jamco Heavy Duty Safety Cabinet Features

More steel than other brands, FM Approved

14 gauge doors are 56% more steel than 18 gauge of others, superior weld hinges with brass pins give greater support for doors, Meet OSHA, NFPA code 30, UFC 79 standards, and are **FM APPROVED** flush handled. Powder Coated Yellow (Flammable), Red (Paint & Ink), Blue (Corrosive), Green (Pesticides) & Gray (Hazardous Waste).

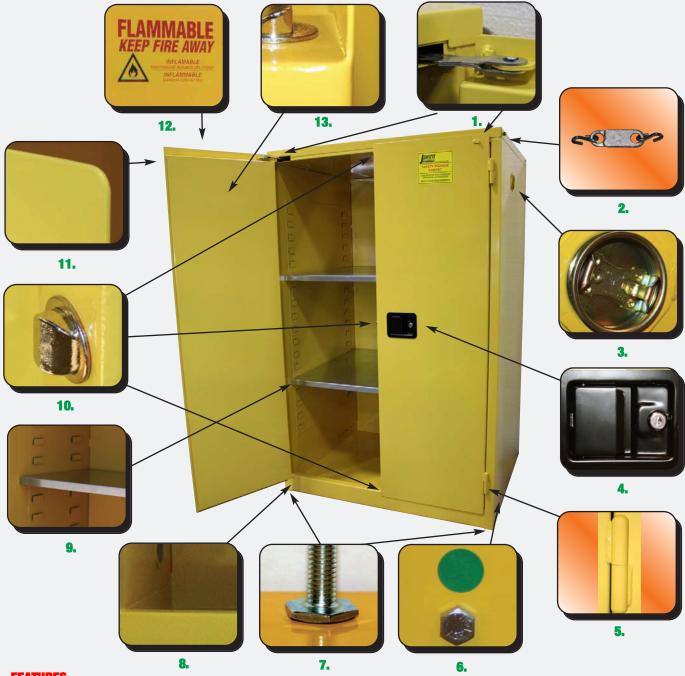

FEATURES


- 1. Exclusive, gas cylinder, self close mechanism
- 2. Lead fusible link
- **3.** 2" flame arrester vents
- 4. Flush Mounted paddle handle
- 5. 4" Heavy Duty weld hinge with 3/8" brass pin
- **6.** Grounding connector
- 7. Adjustable leveling feet

- 8. 2" leak proof sump for spill containment
- **9.** 16 gauge louvered shelf supports to adjust shelves on 2-1/2" centers
- 10. 3 point locking system
- 11. Rounded safety corners on doors
- 12. Safety signage in large red lettering
- 13. Heavy Duty 14 gauge door



Safety Cabinets For Flammables - 3 Door Types

Models BM, BS, BF - flammable liquid storage, double walled



Model BM90 Shown

FLAMMABLE REP FIRE AWAY Concealed Self-Close Mechanism

Model BS60 Shown



Model BF45 Shown

Product Features:

- All welded double wall 18 gauge construction with 1-1/2" insulating air space.
- 2" leakproof sill to contain leaks.
- · Lockable flush mounted handle with 2 keys.
- Doors have 3 point locking system and radius edges.
- Doors are double walled, 14 gauge outside & 18 gauge inside.
- 4" heavy duty weld hinges with 3/8" brass pins.
- Twin 2" flame arrester vents.
- Adjustable leveling feet and grounding connector.
- Powder coated yellow finish.
- Safety signage in large red letters.
- Galvanized steel shelves adjust on 2-1/2" centers.
- Meets OSHA, and NFPA code 30 & UFC 79 standards.



Three Door Types:

Model BM - 2 Doors

• Manual close doors open full 180°.

Model BS - 2 Doors

- Self close doors shut, index, latch automatically as fusible links melt under fire conditions at 165°.
- · Concealed self closing mechanism.

Model BF - 1 Bi-Fold Door

• Manual close door opens to the right.

Options:

· Additional galvanized shelves - see charts

Model BM - Manual Close

Capacity		Size (in)	#	Wgt.	Add'l Shelves	
Gallons	Models	WxDxH	Shelves	(lbs)	Models	Wgt.
22	BM22	34 x 18 x 35	1	182	GS134	8
28	BM28	34 x 18 x 44	2	234	GS134	8
30	BM30	43 x 18 x 44	1	254	GS143	12
44	BM44	34 x 18 x 65	3	334	GS134	8
45	BM45	43 x 18 x 65	2	360	GS143	12
60	BM60	34 x 34 x 65	2	440	GS334	16
90	BM90	43 x 34 x 65	2	504	GS343	22
120	BM120	59 x 34 x 65	2	620	GS359	30

Model BS - Self Close

Capacity		Size (in)	#	Wgt.	Add'l S	Shelves
Gallons	Models	WxDxH	Shelves	(lbs)	Models	Wgt.
22	BS22	34 x 18 x 35	1	196	GS134	8
28	BS28	34 x 18 x 44	2	248	GS134	8
30	BS30	43 x 18 x 44	1	268	GS143	12
44	BS44	34 x 18 x 65	3	348	GS134	8
45	BS45	43 x 18 x 65	2	374	GS143	12
60	BS60	34 x 34 x 65	2	454	GS334	16
90	BS90	43 x 34 x 65	2	518	GS343	22

Model BF - Bi-Fold

Capacity		Size (in)	#	Wgt.	Add'l S	Shelves	
Gallons	Models	WxDxH	Shelves	(lbs)	Models	Wgt.	
30	BF30	43 x 18 x 44	1	260	GS143	12	
45	BF45	43 x 18 x 65	2	366	GS143	12	
60	BF60	34 x 34 x 65	2	446	GS334	16	
90	BF90	43 x 34 x 65	2	510	GS343	22	

Chemical storage maximum - Class I & II - 60 gallons, Class III - 120 gallons

Forkliftable Safety Cabinets For Flammables - 3 Door Types

Models FM, FS, FF - flammable liquid storage, double walled, with floor clearance



Model FM45 Shown

FLAMMABLE REEP FIRE AWAY Concealed Self-Close Mechanism

Model FS45 Shown



Model FF45 Shown

Product Features:

- All welded double wall 18 gauge construction with 1-1/2" insulating air space.
- 4" high feet allow for movement of empty unit with a fork lift truck.
- 2" leakproof sill to contain leaks.
- Lockable flush mounted handle with 2 keys.
- Doors have 3 point locking system and radius edges.
- Doors are double walled, 14 gauge outside & 18 gauge inside.
- 4" heavy duty weld hinges with 3/8" brass pins.
- Twin 2" flame arrester vents.
- Powder coated yellow finish.
- · Safety signage in large red letters.
- Galvanized steel shelves adjust on 2-1/2" centers.
- Meets OSHA, and NFPA code 30 & UFC 79 standards.



Three Door Types:

Model FM - 2 Doors

• Manual close door opens full 180°.

Model FS - 2 Doors

- Self close doors shut, index, latch automatically as fusible links melt under fire conditions at 165°.
- · Concealed self closing mechanism.

Model FF - 1 Bi-Fold Door

Manual close door opens to the right.

Options

Additional galvanized shelves - see charts

Model FM - Manual Close

Capacity		Size (in)	#	Wgt.	Add'l Shelves	
Gallons	Models	WxDxH	Shelves	(lbs)	Models	Wgt.
28	FM28	34 x 18 x 49	2	230	GS134	8
30	FM30	43 x 18 x 49	1	250	GS143	12
44	FM44	34 x 18 x 70	3	340	GS134	8
45	FM45	43 x 18 x 70	2	368	GS143	12
60	FM60	34 x 34 x 70	2	444	GS334	16
90	FM90	43 x 34 x 70	2	508	GS343	22
120	FM120	59 x 34 x 70	2	626	GS359	30

Model FS - Self Close

Capacity		Size (in)	#	Wgt.	Add'l S	Shelves
Gallons	Models	WxDxH	Shelves	(lbs)	Models	Wgt.
28	FS28	34 x 18 x 49	2	250	GS134	8
30	FS30	43 x 18 x 49	1	270	GS143	12
44	FS44	34 x 18 x 70	3	354	GS134	8
45	FS45	43 x 18 x 70	2	388	GS143	12
60	FS60	34 x 34 x 70	2	460	GS334	16
90	FS90	43 x 34 x 70	2	524	GS343	22

Model FF - Bi-Fold

Capacity		Size (in)	#	Wgt.	Add'l S	Shelves		
Gallons	Models	WxDxH	Shelves	(lbs)	Models	Wgt.		
30	FF30	43 x 18 x 49	1	260	GS143	12		
45	FF45	43 x 18 x 70	2	378	GS143	12		
60	FF60	34 x 34 x 70	2	450	GS334	16		
90	FF90	43 x 34 x 70	2	516	GS343	22		

Chemical storage maximum - Class I & II - 60 gallons, Class III - 120 gallons

Safety Cabinets for Flammables - 1 Door Manual

Model BA - contain flammable liquids in protected storage



Model BA Shown

Options:

· Additional galvanized shelves - see charts

Product Features:

- All welded double wall 18 gauge construction with 1-1/2" insulating air space.
- · 2" leakproof sill to contain leaks.
- · Lockable flush mounted handle with 2 keys.
- Door has 3 point locking system and radius edges.
- Door is double walled, 14 gauge outside & 18 gauge inside.
- 4" heavy duty weld hinges with 3/8" brass pins.
- Galvanized steel shelves, adjust on 2-1/2" centers.
- Twin 2" flame arrester vents.
- · Adjustable leveling feet.
- Powder coated yellow finish.
- Safety signage in large red letters.
- · Grounding connector.
- Meets OSHA, and NFPA code 30 standards.
- Manual close door.



Model BA - Manual Close

Capacity		Size (in)	#	Wgt.	Add'l S	Shelves
Gallons	Models	WxDxH	Shelves	(lbs)	Models	Wgt.
6	BA06*	23 x 18 x 22	0	92	GS123	6
12	BA12	23 x 18 x 35	1	130	GS123	6
18	BA18	23 x 18 x 44	2	166	GS123	6
24	BA24	23 x 18 x 65	3	244	GS123	6
60	BA60	23 x 34 x 65	3	410	GS323	12

*Not FM Approved

Chemical storage maximum - Class I & II - 60 gallons, Class III - 120 gallons

Safety Cabinets for Flammables - 1 Door Self Close

Model BJ - 1 contain flammable liquids in protected storage



Model BJ Shown

Options:

· Additional galvanized shelves - see charts

Product Features:

- All welded double wall 18 gauge construction with 1-1/2" insulating air space.
- 2" leakproof sill to contain leaks.
- Lockable flush mounted handle with 2 keys.
- Door has 3 point locking system and radius edges.
- Door is double walled, 14 gauge outside & 18 gauge inside.
- 4" heavy duty weld hinges with 3/8" brass pins.
- Galvanized steel shelves, adjust on 2-1/2" centers.
- Twin 2" flame arrester vents.
- · Adjustable leveling feet.
- Powder coated yellow finish.
- Safety signage in large red letters.
- Grounding connector.
- Meets OSHA, and NFPA code 30 & UFC 79 standards.
- Self close door shuts and latches automatically as fusible link melts under fire conditions at 165°
- · Concealed self closing mechanism.

Model BJ - Self Close

Capacity		Size (in)	#	Wgt.	Add'l Shelves	
Gallons	Models	WxDxH	Shelves	(lbs)	Models	Wgt.
6	BJ06*	23 x 18 x 22	0	98	GS123	6
12	BJ12	23 x 18 x 35	1	142	GS123	6
18	BJ18	23 x 18 x 44	2	178	GS123	6
24	BJ24	23 x 18 x 65	3	250	GS123	6
60	BJ60	23 x 34 x 65	3	416	GS323	12

*Not FM Approved

APPROVED

Safety Cabinets - Under Counter or Fume Hood - 35" High

Models BT, BK - Store flammable items under counter, designed for laboratory use



Model BT22 Shown

Options:

· Additional galvanized shelves - see charts




Concealed Self-Close Mechanism Model BK Only

Product Features:

- All welded double wall 18 gauge construction with 1-1/2" insulating air space. Furniture type kickplate (3"d x 4"h toe kick).
- 2" leakproof sill to contain leaks.
- Lockable flush mounted handle with 2 keys.
- Door(s) have 3 point locking system and radius edges.

 Door(s) are double walled, 14 gauge outside & 18 gauge inside.

 4" heavy duty weld hinges with 3/8" brass pins.
- Twin 2" flame arrester vents mounted on back wall.
- Galvanized steel shelves, adjust on 2-1/2" centers.
- Adjustable leveling feet.
- Powder coated yellow finish. Safety signage in large red letters.
- Grounding connector.
- Meets OSHA, NFPA code 30, & UFC 79 standards.
- Door(s) open full 180°.



Concealed self closing mechanism. (Model BK Only)

Models BT (Manual) & BK (Self-Close) - 35" High

Capacity	Models	Wgt.	Size (in)	Models	Wgt	#	#	Add'l S	helves
Gallons	Manual	(lbs)	WxDxH	Self Close	(lbs)	Shelves	Doors	Models	Wgt.
12	BT12	150	24 x 22 x 35	BK12	156	1	1	GS222	8
22	BT22	198	36 x 22 x 35	BK22	212	1	2	GS322	12
30	BT30	240	48 x 22 x 35	BK30	254	1	2	GS422	16

Chemical storage maximum - Class I & II - 60 gallons, Class III - 120 gallons

Safety Cabinets - Counter Top / Stackable - 22" High

Models BY, BU – Store flammable items on counter or stacked on other cabinets



Model BY15 Shown Stacked on Model BM30

Options:

Additional galvanized shelves - see charts



Concealed Self-Close Mechanism Model BU Only

Product Features:

- All welded double wall 18 gauge construction with 1-1/2" insulating air space.
- 2" leakproof sill to contain leaks.
- Lockable flush mounted handle with 2 keys.
- Door(s) have 3 point locking system and radius edges.

 Door(s) are double walled, 14 gauge outside & 18 gauge inside.

 4" heavy duty weld hinges with 3/8" brass pins.
- Twin 2" flame arrester vents.
- Galvanized steel shelves, adjust on 2-1/2" centers.
- Adjustable leveling feet with rubber caps.
- Powder coated yellow finish. Safety signage in large red letters.
- Grounding connector.
- Meets OSHA, NFPA code 30, & UFC 79 standards.
- Door(s) open full 180°.
- Self close door(s) shut. index and latch automatically as fusible link(s) melt under fire conditions at 165°. (Model BU only)
- Concealed self closing mechanism. (Model BU Only)

Models BY (Manual) & BU (Self-Close) - 22" High

Capacity	Models	Wgt.	Size (in)	Models	Wgt	#	#	Add'l Shelves	
Gallons	Manual	(lbs)	WxDxH	Self Close	(lbs)	Shelves	Doors	Models	Wgt.
6	BY06*	92	23 x 18 x 22	BU06*	98	0	1	GS123	6
11	BY11*	140	34 x 18 x 22	BU11*	154	0	2	GS134	8
15	BY15	160	43 x 18 x 22	BU15	174	0	2	GS143	12

*Not FM Approved

Chemical storage maximum - Class I & II - 60 gallons, Class III - 120 gallons

