
APPROX WEIGHT: 602.86 lbs.

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

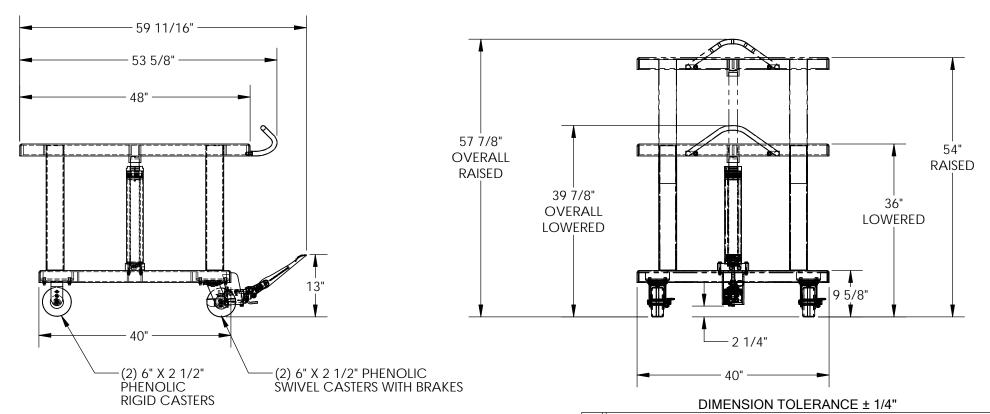

## HYDRAULIC HOSES NOT SHO

## STANDARD FEATURES

SPEC

ENG.

FAB.

**POWER** 

MODEL NUMBER IS HT-60-4048 CAPACITY IS 6,000 LBS.

OVERALL WIDTH IS 40"

**USABLE WIDTH IS 40"** 

OVERALL LENGTH IS 59 11/16"

**USABLE LENGTH IS 48"** 

**RAISED HEIGHT IS 54"** 

LOWERED HEIGHT IS 36" **OVERALL RAISED HEIGHT IS 57 7/8"** 

**OVERALL LOWERED HEIGHT IS 39 7/8"** 

(2) PHENOLIC RIGID CASTERS

(2) PHENOLIC SWIVEL CASTERS WITH BRAKES

SHOWN SPECIAL FEATURES NONE		I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.  ANY MODIFIED UNITS ARE NON-RETURNABLE  [ ] As drawn [ ] As marked			
	A	Signed:			_Date:
	L	Printed Name		IPT OF SIGNED A	APPROVAL DRAWING
FOR INTERNAL USE ONLY	DISTRIBUTOR'S NAME: P.O.# X			P.O.# X	
PROJECT SIGN OFF	V	'ESTIL MAN	IUFACTURII	NG	W.O.# X
SALES	DRA	WN BY: TAW	DATE:	11/2016	SALES: X

4/14/2016

QUOTE #

Χ

SCALE: 1:20 FILE NAME:

21-007-113

TAW

REFERENCE: X

QUOTED LEAD TIME: X