

### Adjustable Width Rack Guard

Protect the row ends of tandem pallet racking with this heavy-duty, welded steel adjustable rack guard. Slide in design has a variable length range of 62" to 108". Includes steel mounting plates with ten (10) 7/8" diameter holes to safely secure unit to floor. Baked-in powder-coated toughness.

MODEL NUMBER	ADJUSTABLE LENGTH	HEIGHT	WEIGHT (POUND)
ARMG-24	62" to 108"	24 <sup>9</sup> / <sub>16</sub> "	183
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"		1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"		4



### Pallet Rack End Guard

Protect pallet rack frame ends with these heavy duty steel guards. For use with 42" deep frames only. Includes pre-drilled mounting holes. Baked-in powder-coated toughness.


MODEL NUMBER	USABLE WIDTH	HEIGHT	WEIGHT (POUND)
PREG-42	43 <sup>1</sup> / <sub>4</sub> "	12 <sup>1</sup> / <sub>2</sub> "	89
AS-125	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5"		1
AS-125-4PK	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5"		4



### Floor Stop Bollards

Unique design offers horizontal crash protection. Base plate includes pre-drilled mounting holes. Removable black plastic end caps. Welded steel construction with a baked-in powder-coated toughness.

MODEL NUMBER	DESCRIPTION	HEIGHT	LENGTH	OUTSIDE DIAMETER	WEIGHT (POUND)
FSBOL-24	FLOOR STOP BOLLARD	5"	24 <sup>3</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>2</sub> "	26
FSBOL-36	FLOOR STOP BOLLARD	5"	36 <sup>3</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>2</sub> "	37
FSBOL-42	FLOOR STOP BOLLARD	5"	42 <sup>3</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>2</sub> "	44
FSBOL-48	FLOOR STOP BOLLARD	5"	48 <sup>3</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>2</sub> "	49
AS-125	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5"				1
AS-125-4PK	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5"				4

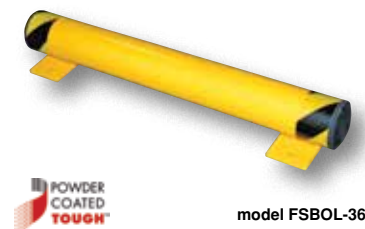

### 90° Triple Elbow Guards

Protect the corners of machinery, buildings, and offices. The 90° bend fits snug around corners to provide the ultimate protection against potential damage from fork trucks or other mobile equipment. Base plate size is 8" x 8". Welded steel construction. Baked-in powder-coated toughness.

MODEL NUMBER	DESCRIPTION	HEIGHT	LENGTH	OUTSIDE DIAMETER	WEIGHT (POUND)
TEG-24-24-4	TRIPLE ELBOW GUARD	24 <sup>9</sup> / <sub>16</sub> "	24 <sup>5</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>2</sub> "	96
TEG-24-36-4	TRIPLE ELBOW GUARD	36 <sup>9</sup> / <sub>16</sub> "	24 <sup>5</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>2</sub> "	108
TEG-24-42-4	TRIPLE ELBOW GUARD	42 <sup>9</sup> / <sub>16</sub> "	24 <sup>5</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>2</sub> "	116
TEG-30-24-4	TRIPLE ELBOW GUARD	24 <sup>9</sup> / <sub>16</sub> "	30 <sup>5</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>2</sub> "	108
TEG-30-36-4	TRIPLE ELBOW GUARD	36 <sup>9</sup> / <sub>16</sub> "	30 <sup>5</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>2</sub> "	114
TEG-30-42-4	TRIPLE ELBOW GUARD	42 <sup>9</sup> / <sub>16</sub> "	30 <sup>5</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>2</sub> "	120
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"				1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"				4



### Triple Elbow Guards with Center Support

Heavy-duty welded steel construction includes three (3) support legs for extra strength and protection. The 90° bend fits snug around corners to provide the ultimate protection against potential damage from fork trucks or other mobile equipment. Base plate size is 4" x 4" with four (4) 7/16" diameter holes. Manufactured from 1 5/8" diameter steel pipe. Baked-in powder-coated toughness.

MODEL NUMBER	HEIGHT	LENGTH	OUTSIDE DIAMETER	WEIGHT (POUND)
TEGC-24-24-2	24"	24"	1 5/8"	56
TEGC-24-36-2	36"	24"	1 5/8"	61
TEGC-24-42-2	42"	24"	1 5/8"	69
TEGC-30-24-2	24"	30"	1 5/8"	66
TEGC-30-36-2	36"	30"	1 5/8"	71
TEGC-30-42-2	42"	30"	1 5/8"	79
AS-383	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3"			1
AS-383-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3"			4

