


## Adjustable Spring Safety Gate

- Adjustable width 22-1/2" to 36"
- Stainless steel torsion spring closes gate automatically
- Spring is tension-adjustable and reversible
- Powder coated red finish (except spring)
- Outside tubing 1.32" O.D. x 12 gauge wall
- Mounting channel is 2" x 1" with three mounting holes (hardware not included)
- Also available with easy mount clamping kits which requires no drilling

Overall W x D x H	Model No.	Includes	Wt.
24 x 3 x 24	SGS-R	Gate Only	18
24 x 3 x 24	SGS-R-EM	Gate with Easy Mount Kit	20

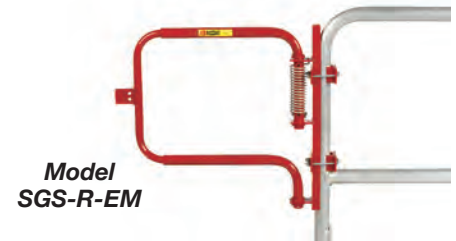

## Hydraulic Arm Safety Gate

- Adjustable width 15" to 31"
- Gate arm uses hydraulic pressure for smooth close
- Closing tension is adjustable
- Mounting plate is 1-3/8" x 6" with 2 mounting holes
- Mount to the left only
- Powder coated red finish

Overall W x D x H	Model No.	Wt.
21 x 3-1/2 x 6	SGH-R	10



## Spill Control Cart

### 3000 lbs. Capacity

- Allows up to four 55 gallon drums
- Durable, welded steel construction
- Sump has removable steel bar grating deck
- 6" non-marking polyurethane casters
- Two rigid and two swivel casters
- Removable pipe handle with cross brace
- Handle extends 25" above top of sump

Sump Cap.	2-DRUM with wheel brakes		4-DRUM with floor lock	
	Model No.	Wt.	Model No.	Wt.
33 Gallon Cap.	SSB-5125-6PYBK	170	-	-
66 Gallon Cap.	SSB-512566-6PYBK	203	SSB-5151-6PYFL	341



**Model  
SSB-5125-6PYBK**



For More Information: 866-333-0728  
 Custom Equipment Company  
 sales@customMhs.com  
 www.customMhs.com