


Model
APT-2448-6PY



Shown with Optional
Pushbar Handle



Shown with Optional
Pushbar Handle
(and without
supplied Uprights)



Shown with Optional
Lip Attachment

Adjustable Sheet & Panel Truck

Ideal for large or small quantities of plywood, drywall, or other sheet material. Includes two heavy-duty uprights that extend 27" above the deck and can be placed in any of four positions. Also great for rolled goods, office partition panels, folding tables or use as a standard platform truck. Two rigid and two swivel casters with choice of wheels provide plenty of carrying capacity.

Wheel type	Deck Size	Model No.	Capacity	Wt.
6" x 2" Non-marking Polyurethane Wheels	24 x 36	APT-2436-6PY	3600 lbs.	99
	24 x 48	APT-2448-6PY	3600 lbs.	117
	24 x 60	APT-2460-6PY	3600 lbs.	134
	24 x 72	APT-2472-6PY	3600 lbs.	156
	30 x 48	APT-3048-6PY	3600 lbs.	132
	30 x 60	APT-3060-6PY	3600 lbs.	150
	30 x 72	APT-3072-6PY	3600 lbs.	170
	36 x 60	APT-3660-6PY	3600 lbs.	165
	36 x 72	APT-3672-6PY	3600 lbs.	187

For 6" Phenolic Wheels, use wheel code: **-6PH** (3600 lbs. Capacity)
For 6" Mold-On Rubber, use wheel code: **-6MR** (2000 lbs. Capacity)
For Wheel Brakes on Swivel Casters, add: **-BK**

Additional Uprights for added storage and Optional Pushbar Handle

	Model No.	Size W x L	Wt.
Additional Uprights	004-0011	for 36" long decks	15
	004-0024	for 48" long decks	18
	004-0023	for 60" long decks	21
	004-0223	for 72" long decks	24
Pushbar Handles	003-0129	for 24" wide decks	13
	003-0131	for 30" wide decks	14
	003-0132	for 36" wide decks	15

LIP ATTACHMENT— Optional 1-1/2" lip attachment inserts into deck and allows improved access from side of truck.

Model No.	Size	Wt.
APT-LIP-36	for 36" long decks	5
APT-LIP-48	for 48" long decks	6
APT-LIP-60	for 60" long decks	7
APT-LIP-72	for 72" long decks	9



Model
APTP-2448-6PY

Adjustable Sheet & Panel Truck with Perforated Deck

2000 lbs. Capacity

Versatile Panel truck is great for moving sheets of plywood, drywall, or any other sheet material. Heavy-duty 12 gauge deck with round perforations. Includes two upright dividers that extend 27" above the deck. Uprights can be placed in 4 positions. Two rigid and two swivel casters with 6" x 2" non-marking polyurethane wheels. Additional uprights, Pushbar Handle, or Lip Attachment are available.

Deck	Model No.	Wt.
24 x 36	APTP-2436-6PY	95
24 x 48	APTP-2448-6PY	111



6-Wheel Adjustable Sheet and Panel Truck

3600 lbs. Capacity

Perfect for moving plywood, drywall, or any sheet products in tight quarters. Six wheel design ensures high maneuverability and “zero turn” capability. Rolls smoothly on 6” non marking Polyurethane wheels. Includes two heavy-duty uprights that extend 27” above the deck and are adjustable in four positions. Additional uprights are also available.

Deck Size	Model No.	Wt.
24 x 48	APT6W-2448-6PY	131
24 x 60	APT6W-2460-6PY	148
30 x 48	APT6W-3048-6PY	146
30 x 60	APT6W-3060-6PY	164
30 x 72	APT6W-3072-6PY	184
36 x 60	APT6W-3660-6PY	179
36 x 72	APT6W-3672-6PY	201




Model
APT6W-2460-6PY

Panel Truck

1000 lbs. Capacity

For transporting panels, roll goods and other long items. Three removable uprights extend 27” above the deck. Load space between uprights is 9-1/2”. Swivel casters have 5” non-marking polyurethane wheels. Available with choice of wood or carpet covered wood rails to protect the load.

	Model No.	Size W x L	Wt.
Wood Ends	◆ PT-2436-5PY	24 x 36	78
Carpeted Ends	◆ PTC-2436-5PY	24 x 36	80

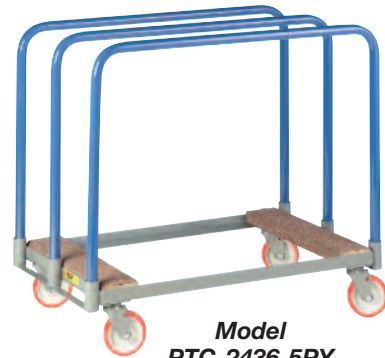

Model
PTC-2436-5PY

Lumber & Panel Cart

3600 lbs. Capacity

Versatile truck transports plywood panels and drywall, as well as lumber, pipe, and other long bulky products. Uprights are 27” and 36” high above the 12 gauge steel deck. Uprights are spaced 6” apart on 24”W deck, 6” and 12” on 30”W deck. Non-marking 6” x 2” polyurethane wheels with 2 rigid and 4 swivel casters. Overall height 45”.

Deck	Model No.	Wt.
24 x 48	LC-2448-6PY	99
30 x 48	LC-3048-6PY	109



Model
LC-2448-6PY

Perforated Deck Lumber Cart

2000 lbs. Capacity

Four swivel casters with 6” Polyurethane wheels for maneuverability in the tightest spaces. Perforated steel deck prevents accumulation of moisture and debris. Inside rail height 34”, outside rail height 24” above deck. Inside rail spacing 9”, outside rail spacing 5-1/2”. Powder coated gray finish.

Overall W x L	Model No.	Wt.
24 x 36	LCP-2436-S-6PY	96

Model
LCP-2436-S-6PY





Wheel Selection Guide

Polyurethane Wheels

Load Capacity Range:
300 – 1,000 lbs.



Characteristics: Easier rolling for higher capacities, long lasting, chemical resistant, non-marking and quiet operation.

High strength polyurethane tread liquid cast and mechanically locked to a polymer or cast metal core. A polyurethane tread is superior for industrial, warehouse and institutional applications with a great combination of easy rolling and maneuverability under heavy load capacity while able to quietly roll over rough floor surfaces.

Phenolic Wheels

Load Capacity Range:
900 – 1,250 lbs.



Characteristics: Best rolling for heavy load capacities, long lasting, chemical resistant, high temperature, non-marking for smooth floor surface.

A solid one piece wheel that is high pressure molded with reinforced fiber-filled phenolic resin. A cost effective wheel best used for high capacity industrial and warehouse applications. Hard tread wheel offers the least rolling resistance on smooth floors, but does not absorb vibration over rough surfaces.

Mold-On Rubber Wheels

Load Capacity Range:
500 – 600 lbs.



Characteristics: Better load capacity, long lasting, cushion tread, absorbs shock and vibration, floor protection and quiet operation.

Rubber tread vulcanized to metal core. A good combination of load capacity and cushion tread that easily and quietly rolls over rough floors. A great wheel choice for heavy industrial and warehouse applications.

Solid Rubber Wheels

Load Capacity Range:
300 – 400 lbs.



Characteristics: Good load capacity, great for rough floor surfaces, puncture-proof, floor protection and quiet operation.

Cushioned rubber tire over plastic hub that is more stable and easier to roll under heavy loads than pneumatic wheels. Sometimes referred to as a semi-pneumatic tire, these wheels are a rugged, maintenance-free (no air pressure to fill and maintain) and are an alternative to pneumatic wheels.

Pneumatic Wheels

Load Capacity Range:
300 – 400 lbs.



Characteristics: Great cushion ride over rough floor surfaces, best option for traveling over small obstructions or outdoor applications. Best shock and vibration absorption.

Like an automotive tire, an air filled rubber tire on a metal hub is able to easily roll over uneven surfaces and bumps but does require air pressure management. Under heavy loads, the pneumatic tire profile will compress creating greater rolling resistance. Pneumatic wheels are ideal for handling fragile loads over rough surfaces.

Flat Free Hand Truck Wheels

Load Capacity Range:
300 lbs.



Characteristics: All of the benefits of a pneumatic wheel without losing air or going flat. This non-marking tire is composed of a dense microcellular polyurethane foam that performs like a pneumatic tire, cushioning the load and rolling over rough surfaces more easily. Upgraded precision ball bearing improves rollability and extends life.

Wheel Specifications

Wheel Dia.	Tread Width	Wheel Type	Bearing I.D.	Centered Hub Model No.	Bearing I.D.	Offset Hub Model No.
5	1-1/4	Polyurethane	3/8" Ball	WHMP-05114		
6	2	Mold-On Rubber Polyurethane Phenolic	Roller	WHMS-0620 WHMP-0620 WHPL-0620		
8	2	Mold-On Rubber Polyurethane Phenolic	Roller	WHMS-0820 WHMP-0820 WHPL-0820		
8	2-1/2	Solid Rubber	3/4" Ball	WHSP-0825	5/8" Ball	WHSP-0825-0
9	3	Pneumatic 2.80/2.50-4	5/8" Ball	WHPN-0830		
10	2-3/4	Solid Rubber	5/8" Ball	WHSP-1027P-C	5/8" Ball	WHSP-1027-P
10	3-1/2	Pneumatic 4.10/3.50-4	5/8" Ball	WHPN-1035-C	5/8" Ball	WHPN-1035
10	3-1/2	Flat Free 4.10/3.50-4 Microcellular Foam			5/8" Ball (Precision)	WHFF-1035
12	2-1/2	Mold-On Rubber	1" Roller	WHMS-12250		
12	3-1/2	Pneumatic 4.10/3.50-6 Pneumatic 4.10/3.50-6	5/8" Ball 1" Roller	WHPN-1235 WHPN-1235-RB		
16	4	Pneumatic 4.80/4.00-8	1" Roller	WHPN-1640		