




PIPE & BAR HANDLING



Model
NBP-2448-8PUBK

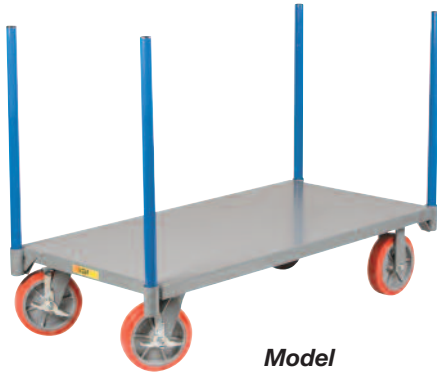

Model
NBP6W-2448-6PY



Model
DT-2448-DIA-4PS



Model
OE-2448-6PY

Pipe Stake Trucks

Ideal for transporting roll goods and other long, bulky loads. Removable 1-5/16" diameter pipe stakes extend 30" above the reinforced 12 gauge deck. 2 rigid and 2 swivel casters with brakes.

	8" x 2" MOLD-ON RUBBER 2400 lbs. Capacity		8" x 2" POLYURETHANE 3600 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 36	NBP-2436-8MRBK	88	NBP-2436-8PUBK	79
24 x 48	NBP-2448-8MRBK	99	NBP-2448-8PUBK	90
30 x 48	NBP-3048-8MRBK	119	NBP-3048-8PUBK	110
30 X 60	NBP-3060-8MRBK	131	NBP-3060-8PUBK	125
36 X 72	NBP-3672-8MRBK	161	NBP-3672-8PUBK	152

6-Wheel Pipe Stake Trucks

Two center-mount rigid and four swivel casters for maneuverability and load stability. Deck is 9" high with 1/2" tilt.

	6" X 2" MOLD-ON RUBBER 2000 lbs. Capacity		6" x 2" POLYURETHANE 3600 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 48	NBP6W-2448-6MR	131	NBP6W-2448-6PY	117
30 x 48	NBP6W-3048-6MR	147	NBP6W-3048-6PY	132
30 X 60	NBP6W-3060-6MR	166	NBP6W-3060-6PY	151
36 X 72	NBP6W-3672-6MR	197	NBP6W-3672-6PY	182

Heavy-Duty Pipe Stake Trucks

Center mounted 12" x 2-1/2" load wheels with two 8" x 2" swivel casters arranged in a diamond pattern. Deck is 14" high with 1/2" tilt.

	RUBBER TREAD ON STEEL WHEELS 3000 lbs. Capacity		POLYURETHANE TREAD ON STEEL WHEELS 4000 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 48	R-2448-DIA-4PS	173	DT-2448-DIA-4PS	190
30 x 48	R-3048-DIA-4PS	181	DT-3048-DIA-4PS	198
30 X 60	R-3060-DIA-4PS	192	DT-3060-DIA-4PS	209
30 X 72	R-3072-DIA-4PS	201	DT-3072-DIA-4PS	219
36 X 60	R-3660-DIA-4PS	202	DT-3660-DIA-4PS	219
36 X 72	R-3672-DIA-4PS	215	DT-3672-DIA-4PS	232


Roll Goods Truck

3600 lbs. Capacity

Welded uprights on two sides of the 12 gauge steel deck are heavy 1-5/16" O.D. tubing. Uprights extend 48" above the deck, with a welded top cross brace for additional strength and rigidity. 2 swivel and 2 rigid casters with 6" x 2" non-marking polyurethane wheels. Durable powder coated finish.

Deck	Model No.	Wt.
24 x 48	OE-2448-6PY	136
24 x 60	OE-2460-6PY	148
30 x 48	OE-3048-6PY	145
30 x 60	OE-3060-6PY	161

For Floor Lock add: -FL



Wheel Selection Guide

Polyurethane Wheels

Load Capacity Range:
300 – 1,000 lbs.



Characteristics: Easier rolling for higher capacities, long lasting, chemical resistant, non-marking and quiet operation.

High strength polyurethane tread liquid cast and mechanically locked to a polymer or cast metal core. A polyurethane tread is superior for industrial, warehouse and institutional applications with a great combination of easy rolling and maneuverability under heavy load capacity while able to quietly roll over rough floor surfaces.

Phenolic Wheels

Load Capacity Range:
900 – 1,250 lbs.



Characteristics: Best rolling for heavy load capacities, long lasting, chemical resistant, high temperature, non-marking for smooth floor surface.

A solid one piece wheel that is high pressure molded with reinforced fiber-filled phenolic resin. A cost effective wheel best used for high capacity industrial and warehouse applications. Hard tread wheel offers the least rolling resistance on smooth floors, but does not absorb vibration over rough surfaces.

Mold-On Rubber Wheels

Load Capacity Range:
500 – 600 lbs.



Characteristics: Better load capacity, long lasting, cushion tread, absorbs shock and vibration, floor protection and quiet operation.

Rubber tread vulcanized to metal core. A good combination of load capacity and cushion tread that easily and quietly rolls over rough floors. A great wheel choice for heavy industrial and warehouse applications.

Solid Rubber Wheels

Load Capacity Range:
300 – 400 lbs.



Characteristics: Good load capacity, great for rough floor surfaces, puncture-proof, floor protection and quiet operation.

Cushioned rubber tire over plastic hub that is more stable and easier to roll under heavy loads than pneumatic wheels. Sometimes referred to as a semi-pneumatic tire, these wheels are a rugged, maintenance-free (no air pressure to fill and maintain) and are an alternative to pneumatic wheels.

Pneumatic Wheels

Load Capacity Range:
300 – 400 lbs.



Characteristics: Great cushion ride over rough floor surfaces, best option for traveling over small obstructions or outdoor applications. Best shock and vibration absorption.

Like an automotive tire, an air filled rubber tire on a metal hub is able to easily roll over uneven surfaces and bumps but does require air pressure management. Under heavy loads, the pneumatic tire profile will compress creating greater rolling resistance. Pneumatic wheels are ideal for handling fragile loads over rough surfaces.

Flat Free Hand Truck Wheels

Load Capacity Range:
300 lbs.



Characteristics: All of the benefits of a pneumatic wheel without losing air or going flat. This non-marking tire is composed of a dense microcellular polyurethane foam that performs like a pneumatic tire, cushioning the load and rolling over rough surfaces more easily. Upgraded precision ball bearing improves rollability and extends life.

Wheel Specifications

Wheel Dia.	Tread Width	Wheel Type	Bearing I.D.	Centered Hub Model No.	Bearing I.D.	Offset Hub Model No.
5	1-1/4	Polyurethane	3/8" Ball	WHMP-05114		
6	2	Mold-On Rubber Polyurethane Phenolic	Roller	WHMS-0620 WHMP-0620 WHPL-0620		
8	2	Mold-On Rubber Polyurethane Phenolic	Roller	WHMS-0820 WHMP-0820 WHPL-0820		
8	2-1/2	Solid Rubber	3/4" Ball	WHSP-0825	5/8" Ball	WHSP-0825-0
9	3	Pneumatic 2.80/2.50-4	5/8" Ball	WHPN-0830		
10	2-3/4	Solid Rubber	5/8" Ball	WHSP-1027P-C	5/8" Ball	WHSP-1027-P
10	3-1/2	Pneumatic 4.10/3.50-4	5/8" Ball	WHPN-1035-C	5/8" Ball	WHPN-1035
10	3-1/2	Flat Free 4.10/3.50-4 Microcellular Foam			5/8" Ball (Precision)	WHFF-1035
12	2-1/2	Mold-On Rubber	1" Roller	WHMS-12250		
12	3-1/2	Pneumatic 4.10/3.50-6 Pneumatic 4.10/3.50-6	5/8" Ball 1" Roller	WHPN-1235 WHPN-1235-RB		
16	4	Pneumatic 4.80/4.00-8	1" Roller	WHPN-1640		