

# Work Positioners

## Non-Straddle Work Positioners



| Model Number                                      | Load Capacity | Raised Height | Lowered Height | Dimensions H / W / L | Base Legs I.D. / O.D. | Wheel Dia. Front/Rear | Shipping Weight |
|---|---------------|---------------|----------------|----------------------|-----------------------|-----------------------|-----------------|
| <b>WP Series - Non-Straddle - 24" Load Center</b> |               |               |                |                      |                       |                       |                 |
| WP36-20   | 2000 lbs      | 36"           | 3-1/4"         | 60 x 28 x 65"        | 14" / 26-1/2"         | 3" / 8"               | 710 lbs         |
| WP48-20   | 2000 lbs      | 48"           | 3-1/4"         | 72 x 28 x 65"        | 14" / 26-1/2"         | 3" / 8"               | 770 lbs         |
| WP60-20   | 2000 lbs      | 60"           | 3-1/4"         | 84 x 28 x 65"        | 14" / 26-1/2"         | 3" / 8"               | 820 lbs         |
| WP36-30   | 3000 lbs      | 36"           | 3-1/4"         | 60 x 28 x 65"        | 14" / 26-1/2"         | 3" / 8"               | 760 lbs         |
| WP48-30   | 3000 lbs      | 48"           | 3-1/4"         | 72 x 28 x 65"        | 14" / 26-1/2"         | 3" / 8"               | 800 lbs         |
| WP60-30   | 3000 lbs      | 60"           | 3-1/4"         | 84 x 28 x 65"        | 14" / 26-1/2"         | 3" / 8"               | 850 lbs         |

For use with open bottom skids only.  
Not for use with closed bottom pallets.

### Features

- 2000 - 3000 lb capacity
- 24" load centers
- Lifting heights - 36" through 60"
- Fixed mast and base
- 2" thick x 6-1/4" wide x 42" long fixed steel forks
- 17" high fork carriage
- 14" fork I.D. & 26-1/2" fork O.D.
- 3-1/4" lowered height
- Steering wheel for greater mobility
- Lifting speed 2" per second for 3000 lb capacity units
- Heavy-duty 12V deep cycle battery
- Custom micro-processor charger
- Hand-operated floor lock
- Nylon front load wheels
- Polyurethane rear wheels
- Optional slip-on platforms available


## Straddle Work Positioners

| Model Number                                     | Load Capacity | Raised Height | Lowered Height | Dimensions H / W / L | Base Legs I.D. / O.D. | Wheel Dia. Front/Rear | Shipping Weight |
|--|---------------|---------------|----------------|----------------------|-----------------------|-----------------------|-----------------|
| <b>WPS42 Series - 42" I.D. - 24" Load Center</b> |               |               |                |                      |                       |                       |                 |
| WPS4236-20                                       | 2000 lbs      | 36"           | 2"             | 59 x 48 x 65"        | 42" / 48"             | 5" / 8"               | 720 lbs         |
| WPS4248-20                                       | 2000 lbs      | 48"           | 2"             | 71 x 48 x 65"        | 42" / 48"             | 5" / 8"               | 745 lbs         |
| WPS4260-20                                       | 2000 lbs      | 60"           | 2"             | 83 x 48 x 65"        | 42" / 48"             | 5" / 8"               | 770 lbs         |
| WPS4236-30                                       | 3000 lbs      | 36"           | 2"             | 59 x 48 x 65"        | 42" / 48"             | 5" / 8"               | 750 lbs         |
| WPS4248-30                                       | 3000 lbs      | 48"           | 2"             | 71 x 48 x 65"        | 42" / 48"             | 5" / 8"               | 775 lbs         |
| WPS4260-30                                       | 3000 lbs      | 60"           | 2"             | 83 x 48 x 65"        | 42" / 48"             | 5" / 8"               | 800 lbs         |
| <b>WPS50 Series - 50" I.D. - 24" Load Center</b> |               |               |                |                      |                       |                       |                 |
| WPS5036-20                                       | 2000 lbs      | 36"           | 2"             | 59 x 56 x 65"        | 42" / 48"             | 5" / 8"               | 730 lbs         |
| WPS5048-20                                       | 2000 lbs      | 48"           | 2"             | 71 x 56 x 65"        | 42" / 48"             | 5" / 8"               | 755 lbs         |
| WPS5060-20                                       | 2000 lbs      | 60"           | 2"             | 83 x 56 x 65"        | 42" / 48"             | 5" / 8"               | 780 lbs         |
| WPS5036-30                                       | 3000 lbs      | 36"           | 2"             | 59 x 56 x 65"        | 42" / 48"             | 5" / 8"               | 760 lbs         |
| WPS5048-30                                       | 3000 lbs      | 48"           | 2"             | 71 x 56 x 65"        | 42" / 48"             | 5" / 8"               | 785 lbs         |
| WPS5060-30                                       | 3000 lbs      | 60"           | 2"             | 83 x 56 x 65"        | 42" / 48"             | 5" / 8"               | 810 lbs         |

For use with wooden closed bottom pallets, double sided pallets and open bottom skids.

### Features

- 2000 - 3000 lb capacity
- 24" load centers
- Lifting heights - 36" through 60"
- Fixed mast
- Fixed base
- 2" thick x 6-1/4" wide x 42" long fixed steel forks
- 17" high fork carriage
- 14" fork I.D. & 26-1/2" fork O.D.
- 2" lowered height
- Steering wheel for greater mobility
- Lifting speed 4" per second for 2000 lb capacity units
- Lifting speed 2" per second on 3000 lb capacity units
- Heavy-duty 12V battery
- Custom micro-processor charger
- Hand-operated floor lock
- Phenolic front load wheels
- Polyurethane rear wheels
- Optional slip-on platforms available

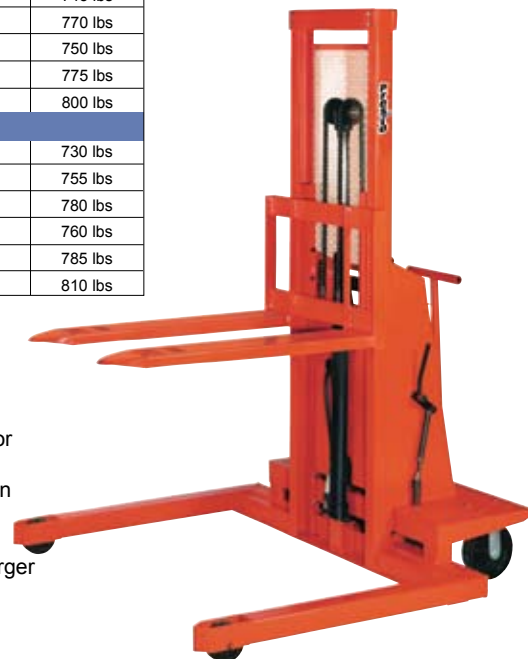

Distributed By: Custom Equipment Company  
866-333-0728 919-847-5765 fax  
tom@custommhs.com www.custommhs.com