

## Why Buckhorn?

Buckhorn offers an extensive selection of reusable bulk boxes, hand-held containers, intermediate bulk containers (IBCs), pallets and specialty boxes designed to protect your products, improve your workflow, lower your operating costs and increase your profitability. We provide superior custom capabilities that fit your precise applications. Our comprehensive market knowledge, attention to quality and dedication to customer-driven innovation adds value at every step of the process. Plus, Buckhorn is committed to protecting the global environment. Put that package together and you get Buckhorn—your single, reliable source for high-quality, cost-effective reusable packaging and material handling systems.

### Packaging to Improve Your Material Handling Performance and Profitability

Eliminating cardboard and wood from the supply chain helps companies grow lean and green. This is the Buckhorn promise to you: We will work with you to create the best reusable packaging programs to deliver value throughout your supply chain—value that improves material handling performance and lowers operating costs in your operations.

#### Benefits include:

- Superior product protection
- Improved workflow
- Increased productivity
- Better ergonomics
- Maximum space usage
- Reduced labor costs
- Lower transport costs
- Ensured product quality
- Enhanced customer service
- Clean work environments
- Sustainable practices

#### Custom Design

Buckhorn can design and custom mold containers, pallets or even complex, proprietary products. From design to prototyping to production, we supply all the services necessary to develop and produce molded plastic parts that meet your specifications and exceed your expectations. We can also make modifications to our standard bulk boxes, hand-held containers and pallets to meet the needs of your specific applications. Our sales team will evaluate your requirements and work with our engineers to come up with the best solution to meet your needs. Call (800) 543-4454 for details!

#### Manufacturing Capabilities: Container Modifications:

- Injection Molding
- Structural Foam Molding
- Blow Molding
- Thermoforming
- Rotational Molding
- Change the dimensions of hand-held containers using a cut and weld process
- Change the dimensions of bulk boxes or pallets using a cut and bolt process
- Add a removable panel to bulk boxes for easy access to large, bulky items
- Fabricate a side discharge for bulk boxes with an interior funnel
- Add casters to bulk boxes



Distributed by:  
 Custom Equipment Company  
 866-333-0728  
 sales@custommhs.com  
 www.custommhs.com

## Product Quality, Innovation & Sustainability

### Quality

Buckhorn is certified to ISO 9001:2015 standards. Our people work as a team with one focus: excellence for each customer. It is our commitment to continuously improve designs, processes and distribution of products that consistently meet or exceed customer expectations. Buckhorn uses a wide range of manufacturing processes to meet or exceed your expectations for product quality. We utilize high-grade polymer resins in every reusable packaging product—quality in equals quality out. Additionally, we employ the latest molding and testing technologies to ensure superior performance for long-term customer satisfaction.

### History of Innovation

We are proud to lead the industry with packaging innovations that translate into customer value. The first plastic bakery tray; the first plastic attached lid distribution container; the first plastic seed handling container; and the first reusable, integrated plastic container and pallet system to be used in the automotive industry.

We are continuously listening to our customers, evaluating supply chain requirements and developing new products and systems to meet the current and future needs of the markets. Our attention to innovation opens up limitless opportunities to improve your productivity and profitability.

### Sustainability

Buckhorn reusable packaging systems do more than protect your products—they protect the global environment as well. In instances where quality will not be compromised, we utilize recycled plastic resin in our products. On average this equates to about 21% recycled content.



Buckhorn is certified to ISO 9001:2015 standards

### Did You Know...?

Buckhorn offers a recycling and buy-back program, removing damaged or unusable products from your system.

- A cost-effective alternative to high disposal costs
- Removes damaged, unusable or old products from your system
- In some cases, you can receive credit toward future purchases



**Reusable  
Recyclable  
Responsible**

*Buckhorn's Buy Back Program*

Be Responsible and Let Buckhorn Buy Back Your Recyclable and Reusable Pallets, Bulk Boxes and Plastic Containers. Contact Our Customer Service Department at 800-543-4454 or your local Buckhorn Sales Representative For Details!

# BULK BOXES

## An Extensive Selection of Bulk Boxes

Buckhorn's extensive selection of bulk boxes are ideal for a broad range of material handling applications and support capacities ranging from 1,200 to 2,500 lbs. These industry-leading reusable containers allow you to ship, store and handle your products with ease while increasing your operation's productivity and profitability.

## Bulk Boxes Overview



### Strength

Our bulk boxes are the best in the business! We incorporate all the details that make Buckhorn an unsurpassed value: durable HDPE construction, thicker sidewalls and high strength bases – extending the useful service life of the containers and allowing more round trips.

### Easy Handling

Fork access on four sides allows for easy maneuvering in trailers and storage areas. Up to four drop doors are available on collapsible boxes for better access to contents.

### Easy Set-Up and Collapsibility

Handhold areas on panels provide a comfortable grip for panel movement.

### Secure, Positive Stacking

Boxes stack securely for improved product protection and worker safety.

### High Return Ratio

Buckhorn boxes collapse flat in seconds and stack for storage and return shipment – optimizing space usage and saving money on return freight.



## Did You Know...?

Buckhorn's Bulk Boxes are subjected to rigorous AIAG and ASTM tests in our in-house lab. Complete material and product testing includes:

- Extensive validation and quality assurance regimens
- Impact performance testing
- Compression testing
- Dynamic transit simulation for AIAG testing
- Finite element analysis



## General Purpose Boxes

### Capacity: 1,200 lbs.

Buckhorn's General Purpose Bulk Boxes are rated for 1,200-lb. load capacities. They work well for applications such as beverage preforms, caps and closures, and warehouse distribution.

### Features and Benefits

- Footprint: 48" x 40"
- Optional plastic runners for conveyability
- Drop-doors and four-way forklift entry improve ergonomics and handling
- Superior durability for reliable performance
- Customization and identification options available
- Backed by a one-year limited warranty
- 100% recyclable HDPE

### Options

- Nine Feet or Five Plastic Runners
- ID Tags
- Label Placards
- Cardholders
- Bar Coding
- Sequential Numbering
- Standard Colors

See p. 74-76 for more information.

## Compatible Components

| Bulk Box                          | Lid                   | Dolly      |
|-----------------------------------|-----------------------|------------|
| 48" x 40" Boxes with Five Runners | TG48400200, TS4840020 | DY48400900 |
| 48" x 40" Boxes with Nine Feet    | TS48400399            | DY48400900 |

See p. 26 for more information.



**Locking Latches**  
Spring action, sliding latches automatically lock hinged sidewalls and access doors

BG48404602


**Drop Doors**  
Access doors on up to two sides for quick, easy loading or retrieval of contents

Distributed by:  
Custom Equipment Company  
866-333-0728  
sales@custommhs.com  
www.custommhs.com

## General Purpose Specifications

| Model No.              | Footprint       | Description         | Dimensions (in.) |        |        |        |        |               |                  |              |       | Weight | Capacity     |                | Fork Tunnel Dimensions (in.) |           |        |            | Shipping |              |                    |
|------------------------|-----------------|---------------------|------------------|--------|--------|--------|--------|---------------|------------------|--------------|-------|--------|--------------|----------------|------------------------------|-----------|--------|------------|----------|--------------|--------------------|
|                        |                 |                     | Outside          |        |        | Inside |        |               | Col-lapsed<br>H" | Door Opening |       |        | Tare<br>lbs. | Weight<br>lbs. | Volume<br>cu. ft.            | Long Side |        | Short Side |          | Return Ratio | Truck Capacity 53' |
|                        |                 |                     | L" (A)           | W" (B) | H" (C) | L" (D) | W" (E) | Usable H" (F) |                  | L"           | D"    | W" (G) |              |                |                              | H" (H)    | W" (I) | H" (J)     | Opened   |              | Collapsed          |
| <b>48" x 40" Boxes</b> |                 |                     |                  |        |        |        |        |               |                  |              |       |        |              |                |                              |           |        |            |          |              |                    |
| BG48403320             | 48" x 40" x 33" | Two Doors on Length | 48.0             | 40.0   | 33.0   | 45.0   | 37.0   | 27.0          | 15.3             | 33.5         | 14.1  | 129.0  | 1200         | 28.3           | 13.0                         | 3.5       | 12.0   | 3.5        | 2.2:1    | 90           | 240                |
|                        | mm/kg/l         |                     | 1219.2           | 1016.0 | 838.2  | 1143.0 | 939.8  | 685.8         | 388.6            | 850.9        | 358.1 | 58.5   | 544          | 801.4          | 330.2                        | 88.9      | 304.8  | 88.9       |          |              |                    |
| BG48404602             | 48" x 40" x 46" | Two Doors on Width  | 48.0             | 40.0   | 46.0   | 45.0   | 37.0   | 40.0          | 15.3             | 33.5         | 23.1  | 142.0  | 1200         | 38.5           | 13.0                         | 3.5       | 12.0   | 3.5        | 3.6:1    | 60           | 240                |
|                        |                 |                     | 1219.2           | 1016.0 | 1168.4 | 1143.0 | 939.8  | 1016.0        | 388.6            | 850.9        | 586.7 | 64.4   | 544          | 1090.2         | 330.2                        | 88.9      | 304.8  | 88.9       |          |              |                    |

No-door boxes available. Visit [www.buckhorninc.com](http://www.buckhorninc.com) for more information.



All heights are based on the version with nine feet. Add 1.5" for versions with five runners. Add 0.5" to fork tunnel height for versions with five runners. Capacity is dependent upon application and use environment. It is based on equally distributed loads. Elevated temperatures or concentrated loads may affect capacity. Truck capacity based on versions with nine feet. Call Buckhorn for versions with five runners. Check with Buckhorn for suitability in your application. Specifications subject to change without notice. **All dimensions are approximate.**



BG48403320

### Did You Know...?

Cardboard damages quality. Unlike disposable packaging, reusable containers withstand repeated use and deliver superior product protection to maintain quality and reduce scrap rate. Hidden costs of cardboard include:

- Damaged product as boxes are crushed from stacking
- Truck trailers are not fully cubed, resulting in wasted space and more trips
- Cardboard is one-way use and is an expense every time you ship. It adds labor costs for breakdown and removal, plus disposal costs



## Standard-Duty Boxes

**Capacity: 1,800 lbs.**

Buckhorn’s Standard-Duty Bulk Boxes are rated for load capacities of 1,800 lbs. As the name suggests, these boxes are suitable for a variety of manufacturing applications. The 32” x 30” boxes, in particular, work well with dense loads of small heavy parts.

### Features and Benefits

- Footprints: 32” x 30” and 48” x 45”
- Plastic runners for added stacking strength
- Drop-doors and four-way forklift entry improve ergonomics and handling
- 48” x 45” footprints available in extended heights
- Superior durability for reliable performance
- Customization and identification options available
- Backed by a one-year limited warranty
- 100% recyclable HDPE

### Options

- ID Tags
- Label Placards
- Cardholders
- Bar Coding
- Sequential Numbering
- Standard Colors

See p. 74-76 for more information.

### Compatible Components


| Bulk Box        | Lid        | Dolly      |
|-----------------|------------|------------|
| 32” x 30” Boxes | TS32300200 | DY32300900 |
| 48” x 45” Boxes | TS48450300 | DY48450900 |

See p. 26 for more information.



BN32303420

**Forklift Entry & Stackability**  
Four-way forklift entry improves ergonomics and handling efficiency; plastic runners for added stacking strength

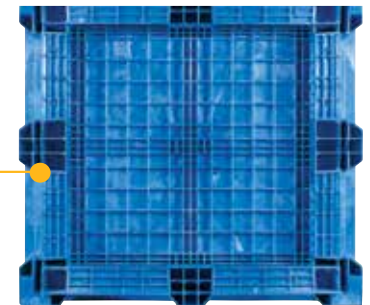


**Base Runners**  
Plastic runners for added stacking strength

## Standard-Duty Specifications

| Model No.              | Footprint       | Description                   | Dimensions (in.) |        |        |        |        |               |                 |              |       |              | Weight         |                   |           | Capacity |            |        | Fork Tunnel Dimensions (in.) |                    |           |  | Shipping |  |  |
|------------------------|-----------------|-------------------------------|------------------|--------|--------|--------|--------|---------------|-----------------|--------------|-------|--------------|----------------|-------------------|-----------|----------|------------|--------|------------------------------|--------------------|-----------|--|----------|--|--|
|                        |                 |                               | Outside          |        |        | Inside |        |               | Collapsed<br>H" | Door Opening |       | Tare<br>lbs. | Weight<br>lbs. | Volume<br>cu. ft. | Long Side |          | Short Side |        | Return Ratio                 | Truck Capacity 53' |           |  |          |  |  |
|                        |                 |                               | L" (A)           | W" (B) | H" (C) | L" (D) | W" (E) | Usable H" (F) |                 | L"           | D"    |              |                |                   | W" (G)    | H" (H)   | W" (I)     | H" (J) |                              | Opened             | Collapsed |  |          |  |  |
| <b>32" x 30" Boxes</b> |                 |                               |                  |        |        |        |        |               |                 |              |       |              |                |                   |           |          |            |        |                              |                    |           |  |          |  |  |
| BN32302520             | 32" x 20" x 25" | Two Doors on Length           | 32.0             | 30.0   | 25.0   | 29.5   | 27.5   | 18.4          | 13.1            | 18.0         | 9.3   | 64.0         | 1800           | 8.6               | 10.6      | 3.5      | 7.6        | 2.0    | 1.9:1                        | 240                | 480       |  |          |  |  |
|                        | mm/kg/l         |                               | 812.8            | 762.0  | 635.0  | 749.3  | 698.5  | 467.4         | 332.7           | 457.2        | 236.2 | 29.0         | 816            | 243.5             | 269.2     | 88.9     | 193.0      | 50.8   |                              |                    |           |  |          |  |  |
| BN32303420             | 32" x 30" x 34" | Two Doors on Length           | 32.0             | 30.0   | 34.0   | 29.5   | 27.5   | 27.4          | 13.1            | 18.0         | 14.0  | 78.0         | 1800           | 12.9              | 10.6      | 3.5      | 7.6        | 2.0    | 2.6:1                        | 180                | 480       |  |          |  |  |
|                        |                 |                               | 812.8            | 762.0  | 863.6  | 749.3  | 698.5  | 696.0         | 332.7           | 457.2        | 355.6 | 35.4         | 816            | 365.3             | 269.2     | 88.9     | 193.0      | 50.8   |                              |                    |           |  |          |  |  |
| <b>48" x 45" Boxes</b> |                 |                               |                  |        |        |        |        |               |                 |              |       |              |                |                   |           |          |            |        |                              |                    |           |  |          |  |  |
| BX484544B0             | 48" x 45" x 44" | Two Deep Drop Doors on Length | 48.0             | 45.0   | 44.0   | 44.5   | 41.5   | 37.0          | 23.3            | 30.8         | 21.0  | 206.0        | 1800           | 39.5              | 11.6      | 3.3      | 11.9       | 3.4    | 2:1                          | 52                 | 104       |  |          |  |  |
|                        | mm/kg/l         |                               | 1219.2           | 1143.0 | 1117.6 | 1130.3 | 1054.1 | 939.8         | 591.8           | 782.3        | 533.4 | 93.4         | 816            | 1118.5            | 294.6     | 83.8     | 302.3      | 86.4   |                              |                    |           |  |          |  |  |
| BX484550B0             | 48" x 45" x 50" | Two Deep Drop Doors on Length | 48.0             | 45.0   | 50.0   | 44.5   | 41.5   | 43.0          | 29.3            | 30.8         | 21.0  | 226.0        | 1800           | 46.0              | 11.6      | 3.3      | 11.9       | 3.4    | 1.7:1                        | 52                 | 78        |  |          |  |  |
|                        |                 |                               | 1219.2           | 1143.0 | 1270.0 | 1130.3 | 1054.1 | 1092.2        | 744.2           | 782.3        | 533.4 | 102.5        | 816            | 1302.6            | 294.6     | 83.8     | 302.3      | 86.4   |                              |                    |           |  |          |  |  |

No-door boxes available. Visit [www.buckhorninc.com](http://www.buckhorninc.com) for more information.



Capacity is dependent upon application and use environment. It is based on equally distributed loads. Elevated temperatures or concentrated loads may affect capacity. Check with Buckhorn for suitability in your application. Specifications subject to change without notice. **All dimensions are approximate.**



BX484550B0

Distributed by:  
 Custom Equipment Company  
 866-333-0728  
[sales@custommhs.com](mailto:sales@custommhs.com)  
[www.custommhs.com](http://www.custommhs.com)



## Extra-Duty Boxes

**Capacity: 2,000 - 2,500 lbs.**

Buckhorn's Extra-Duty Bulk Boxes are rated for load capacities between 2,000 and 2,500 lbs. These boxes have the weight capacity and durable construction to make them particularly suitable in industries such as automotive and appliance manufacturing.

### Features and Benefits

- Footprint: 48" x 45"
- Available in extended heights
- Latched panels and doors
- Have plastic or steel runners for added stacking strength
- Drop-doors and four-way forklift entry improve ergonomics and handling
- Superior durability for reliable performance
- Customization and identification options available
- Backed by a one-year limited warranty
- 100% recyclable HDPE

### Options

- ID Tags
- Label Placards
- Cardholders
- Bar Coding
- Sequential Numbering
- Standard Colors

See p. 74-76 for more information.



## Compatible Components


| Bulk Box        | Lid        | Dolly      |
|-----------------|------------|------------|
| 48" x 45" Boxes | TS48450300 | DY48450900 |

See p. 26 for more information.

## Extra-Duty Specifications

| Model No.         | Footprint       | Description                   | Dimensions (in.) |        |        |        |        |               |           |              |       | Weight |        | Capacity |           | Fork Tunnel Dimensions (in.) |            |        |              | Shipping           |           |  |
|-------------------|-----------------|-------------------------------|------------------|--------|--------|--------|--------|---------------|-----------|--------------|-------|--------|--------|----------|-----------|------------------------------|------------|--------|--------------|--------------------|-----------|--|
|                   |                 |                               | Outside          |        |        | Inside |        |               | Collapsed | Door Opening |       | Tare   | Weight | Volume   | Long Side |                              | Short Side |        | Return Ratio | Truck Capacity 53' |           |  |
|                   |                 |                               | L" (A)           | W" (B) | H" (C) | L" (D) | W" (E) | Usable H" (F) | H"        | L"           | D"    | lbs.   | lbs.   | cu. ft.  | W" (G)    | H" (H)                       | W" (I)     | H" (J) |              | Opened             | Collapsed |  |
| <b>Extra Duty</b> |                 |                               |                  |        |        |        |        |               |           |              |       |        |        |          |           |                              |            |        |              |                    |           |  |
| BN48452520        | 48" x 45" x 25" | Two Doors on Length           | 48.0             | 45.0   | 25.0   | 44.5   | 41.5   | 18.3          | 12.8      | 31.8         | 10.3  | 100.0  | 2500   | 19.1     | 11.0      | 3.3                          | 12.3       | 3.3    | 2.3:1        | 104                | 234       |  |
|                   | mm/kg/l         |                               | 1219.2           | 1143.0 | 635.0  | 1130.3 | 1054.1 | 464.8         | 325.1     | 807.7        | 261.6 | 45.4   | 1134   | 540.9    | 279.4     | 83.8                         | 312.4      | 83.8   |              |                    |           |  |
| BN48453420        | 48" x 45" x 34" | Two Doors on Length           | 48.0             | 45.0   | 34.0   | 44.5   | 41.5   | 27.0          | 12.8      | 31.8         | 14.5  | 122.0  | 2500   | 28.7     | 11.0      | 3.3                          | 12.3       | 3.3    | 3:1          | 78                 | 234       |  |
|                   |                 |                               | 1219.2           | 1143.0 | 863.6  | 1130.3 | 1054.1 | 685.8         | 325.1     | 807.7        | 368.3 | 55.3   | 1134   | 812.7    | 279.4     | 83.8                         | 312.4      | 83.8   |              |                    |           |  |
| BN48453520        | 48" x 45" x 35" | Two Doors on Length           | 48.0             | 45.0   | 35.0   | 44.5   | 41.5   | 28.0          | 19.8      | 31.8         | 10.3  | 132.0  | 2000   | 29.9     | 11.0      | 3.3                          | 12.3       | 3.3    | 1.7:1        | 78                 | 130       |  |
|                   |                 |                               | 1219.2           | 1143.0 | 889.0  | 1130.3 | 1054.1 | 711.2         | 502.9     | 807.7        | 261.6 | 59.9   | 907    | 846.7    | 279.4     | 83.8                         | 312.4      | 83.8   |              |                    |           |  |
| BN48453920        | 48" x 45" x 39" | Two Doors on Length           | 48.0             | 45.0   | 39.0   | 44.5   | 41.5   | 32.0          | 17.8      | 31.8         | 10.3  | 149.0  | 2000   | 34.2     | 11.0      | 3.3                          | 12.3       | 3.3    | 2.1:1        | 52                 | 130       |  |
|                   |                 |                               | 1219.2           | 1143.0 | 990.6  | 1130.3 | 1054.1 | 812.8         | 452.1     | 807.7        | 261.6 | 67.6   | 907    | 968.4    | 279.4     | 83.8                         | 312.4      | 83.8   |              |                    |           |  |
| BN48454120        | 48" x 45" x 41" | Two Doors on Length           | 48.0             | 45.0   | 41.0   | 44.5   | 41.5   | 34.0          | 19.8      | 31.8         | 14.5  | 147.0  | 2000   | 36.3     | 11.0      | 3.3                          | 12.3       | 3.3    | 2.1:1        | 52                 | 130       |  |
|                   |                 |                               | 1219.2           | 1143.0 | 1041.4 | 1130.3 | 1054.1 | 863.6         | 502.9     | 807.7        | 368.3 | 66.7   | 907    | 1027.9   | 279.4     | 83.8                         | 312.4      | 83.8   |              |                    |           |  |
| BN48454420        | 48" x 45" x 44" | Two Doors on Length           | 48.0             | 45.0   | 44.0   | 44.5   | 41.5   | 37.0          | 22.8      | 31.8         | 14.5  | 154.0  | 2000   | 39.5     | 11.0      | 3.3                          | 12.3       | 3.3    | 2.1:1        | 52                 | 104       |  |
|                   |                 |                               | 1219.2           | 1143.0 | 1117.6 | 1130.3 | 1054.1 | 939.8         | 579.1     | 807.7        | 368.3 | 69.9   | 907    | 1118.5   | 279.4     | 83.8                         | 312.4      | 83.8   |              |                    |           |  |
| BN48455120        | 48" x 45" x 51" | Two Doors on Length           | 48.0             | 45.0   | 51.0   | 44.5   | 41.5   | 44.0          | 29.8      | 31.8         | 14.5  | 179.0  | 2000   | 47.0     | 11.0      | 3.3                          | 12.3       | 3.3    | 1.7:1        | 52                 | 78        |  |
|                   |                 |                               | 1219.2           | 1143.0 | 1295.4 | 1130.3 | 1054.1 | 1117.6        | 756.9     | 807.7        | 368.3 | 81.2   | 907    | 1330.9   | 279.4     | 83.8                         | 312.4      | 83.8   |              |                    |           |  |
| BE484544B0        | 48" x 45" x 44" | Two Deep Drop-Doors on Length | 48.0             | 45.0   | 44.0   | 44.5   | 41.5   | 37.0          | 23.3      | 30.8         | 21.0  | 206.0  | 2000   | 39.5     | 11.6      | 3.3                          | 11.9       | 3.4    | 2:1          | 52                 | 104       |  |
|                   |                 |                               | 1219.2           | 1143.0 | 1117.6 | 1130.3 | 1054.1 | 939.8         | 591.8     | 782.3        | 533.4 | 93.4   | 907    | 1118.5   | 294.6     | 83.8                         | 302.3      | 86.4   |              |                    |           |  |
| BE484550B0        | 48" x 45" x 50" | Two Deep Drop-Doors on Length | 48.0             | 45.0   | 50.0   | 44.5   | 41.5   | 43.0          | 29.3      | 30.8         | 21.0  | 226.0  | 2000   | 46.0     | 11.6      | 3.3                          | 11.9       | 3.4    | 1.7:1        | 52                 | 78        |  |
|                   |                 |                               | 1219.2           | 1143.0 | 1270.0 | 1130.3 | 1054.1 | 1092.2        | 744.2     | 782.3        | 533.4 | 102.5  | 907    | 1302.6   | 294.6     | 83.8                         | 302.3      | 86.4   |              |                    |           |  |

No-door boxes available. Visit [www.buckhorninc.com](http://www.buckhorninc.com) for more information.



Capacity is dependent upon application and use environment. It is based on equally distributed loads. Elevated temperatures or concentrated loads may affect capacity. Check with Buckhorn for suitability in your application. Specifications subject to change without notice. All dimensions are approximate.

### Extension Rings

Additional heights not listed are available; Buckhorn offers 7" and 10" extension rings that can be added in any combination to the BN484525 and BN484534 models



BN48455120



BE484544B0



BE484550B0

# Heavy-Duty Boxes

**Capacity: 2,000 - 2,500 lbs.**

Buckhorn's Heavy-Duty Bulk Boxes are rated for load capacities between 2,000 and 2,500 lbs. These boxes are the most robust in the industry. Their weight capacity, post and pocket design, steel runners and hit plates make them suitable for heavy parts in rugged applications.

### Features and Benefits

- Footprints: 48" x 40" and 48" x 45"
- Feature steel corner hit plates to deflect fork tines
- Post and pocket panels
- Three recessed steel base runners for added stacking strength
- Drop-doors and four-way forklift entry improve ergonomics and handling
- Extension rings available for taller heights
- Superior durability for reliable performance
- Customization and identification options available
- Backed by a one-year limited warranty
- 100% recyclable HDPE

### Options


- ID Tags
- Label Placards
- Cardholders
- Bar Coding
- Sequential Numbering
- Standard Colors

See p. 74-76 for more information.

### Compatible Components

| Bulk Box        | Lid        | Dolly      |
|-----------------|------------|------------|
| 48" x 40" Boxes | TH48400200 | DY48400900 |
| 48" x 45" Boxes | TH48450200 | DY48450900 |


See p. 26 for more information.

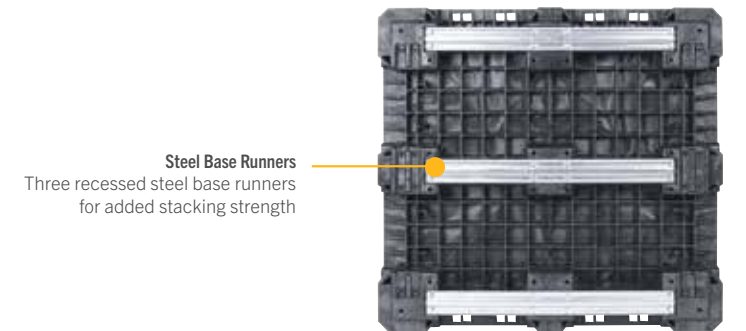

## Heavy-Duty Specifications

| Model No.        | Footprint       | Description         | Dimensions (in.) |        |        |        |        |               |           |              |       | Weight |        | Capacity |           | Fork Tunnel Dimensions (in.) |            |        |              | Shipping           |           |  |
|------------------|-----------------|---------------------|------------------|--------|--------|--------|--------|---------------|-----------|--------------|-------|--------|--------|----------|-----------|------------------------------|------------|--------|--------------|--------------------|-----------|--|
|                  |                 |                     | Outside          |        |        | Inside |        |               | Collapsed | Door Opening |       | Tare   | Weight | Volume   | Long Side |                              | Short Side |        | Return Ratio | Truck Capacity 53' |           |  |
|                  |                 |                     | L" (A)           | W" (B) | H" (C) | L" (D) | W" (E) | Usable H" (F) | H"        | L"           | D"    | lbs.   | lbs.   | cu. ft.  | W" (G)    | H" (H)                       | W" (I)     | H" (J) |              | Opened             | Collapsed |  |
| <b>48" x 40"</b> |                 |                     |                  |        |        |        |        |               |           |              |       |        |        |          |           |                              |            |        |              |                    |           |  |
| BH48402520       | 48" x 40" x 25" | Two Doors on Length | 47.6             | 39.8   | 25.0   | 44.0   | 36.3   | 18.3          | 14.1      | 27.1         | 10.7  | 121.3  | 2500   | 16.9     | 11.8      | 3.2                          | 10.4       | 4.1    | 2.1:1        | 120                | 240       |  |
|                  | mm/kg/l         |                     | 1209.0           | 1010.9 | 635.0  | 1117.6 | 922.0  | 464.8         | 358.1     | 688.3        | 271.8 | 55.0   | 1134   | 478.6    | 299.7     | 81.3                         | 264.2      | 104.1  |              |                    |           |  |
| BH48403020       | 48" x 40" x 30" | Two Doors on Length | 47.6             | 39.8   | 29.9   | 44.0   | 36.3   | 22.5          | 14.1      | 27.1         | 14.0  | 132.4  | 2500   | 20.8     | 11.8      | 3.2                          | 10.4       | 4.1    | 2.5:1        | 90                 | 240       |  |
|                  | mm/kg/l         |                     | 1209.0           | 1010.9 | 759.5  | 1117.6 | 922.0  | 571.5         | 358.1     | 688.3        | 355.6 | 60.1   | 1134   | 589.0    | 299.7     | 81.3                         | 264.2      | 104.1  |              |                    |           |  |
| BH48403420       | 48" x 40" x 34" | Two Doors on Length | 47.6             | 39.8   | 33.9   | 44.0   | 36.3   | 26.5          | 14.1      | 27.1         | 14.0  | 141.2  | 2500   | 24.5     | 11.8      | 3.2                          | 10.4       | 4.1    | 3:1          | 90                 | 242       |  |
|                  | mm/kg/l         |                     | 1209.0           | 1010.9 | 861.1  | 1117.6 | 922.0  | 673.1         | 358.1     | 688.3        | 355.6 | 64.0   | 1134   | 693.8    | 299.7     | 81.3                         | 264.2      | 104.1  |              |                    |           |  |
| <b>48" x 45"</b> |                 |                     |                  |        |        |        |        |               |           |              |       |        |        |          |           |                              |            |        |              |                    |           |  |
| BH48452520       | 48" x 45" x 25" | Two Doors on Length | 47.6             | 44.6   | 25.6   | 44.3   | 41.3   | 18.7          | 13.6      | 27.1         | 10.7  | 140.0  | 2500   | 19.7     | 11.9      | 3.3                          | 10.5       | 3.7    | 2.1:1        | 112                | 224       |  |
|                  | mm/kg/l         |                     | 1209.0           | 1132.8 | 650.2  | 1125.2 | 1049.0 | 475.0         | 345.4     | 688.3        | 271.8 | 63.5   | 1134   | 557.8    | 302.3     | 83.8                         | 266.7      | 94.0   |              |                    |           |  |
| BH48453020       | 48" x 45" x 30" | Two Doors on Length | 47.6             | 44.6   | 29.9   | 44.3   | 41.3   | 22.9          | 13.6      | 27.1         | 14.0  | 152.0  | 2500   | 24.2     | 11.9      | 3.3                          | 10.5       | 3.7    | 2.5:1        | 84                 | 224       |  |
|                  | mm/kg/l         |                     | 1209.0           | 1132.8 | 759.5  | 1125.2 | 1049.0 | 581.7         | 345.4     | 688.3        | 355.6 | 68.9   | 1134   | 685.3    | 302.3     | 83.8                         | 266.7      | 94.0   |              |                    |           |  |
| BH48453420       | 48" x 45" x 34" | Two Doors on Length | 47.6             | 44.6   | 34.0   | 44.3   | 41.3   | 27.1          | 13.6      | 27.1         | 14.0  | 163.0  | 2500   | 28.7     | 11.9      | 3.3                          | 10.5       | 3.7    | 3:1          | 84                 | 224       |  |
|                  | mm/kg/l         |                     | 1209.0           | 1132.8 | 863.6  | 1125.2 | 1049.0 | 688.3         | 345.4     | 688.3        | 355.6 | 73.9   | 1134   | 812.7    | 302.3     | 83.8                         | 266.7      | 94.0   |              |                    |           |  |
| BH48454120       | 48" x 45" x 41" | Two Doors on Length | 47.6             | 44.6   | 41.0   | 44.3   | 41.3   | 34.1          | 20.6      | 27.1         | 14.0  | 195.0  | 2000   | 35.9     | 11.9      | 3.3                          | 10.5       | 3.7    | 2.5:1        | 52                 | 130       |  |
|                  | mm/kg/l         |                     | 1209.0           | 1132.8 | 1041.4 | 1125.2 | 1049.0 | 866.1         | 523.2     | 688.3        | 355.6 | 88.5   | 907    | 1016.6   | 302.3     | 83.8                         | 266.7      | 94.0   |              |                    |           |  |
| BH48454420       | 48" x 45" x 44" | Two Doors on Length | 47.6             | 44.6   | 44.0   | 44.3   | 41.3   | 37.1          | 23.6      | 27.1         | 14.0  | 202.0  | 2000   | 39.2     | 11.9      | 3.3                          | 10.5       | 3.7    | 2:1          | 52                 | 104       |  |
|                  | mm/kg/l         |                     | 1209.0           | 1132.8 | 1117.6 | 1125.2 | 1049.0 | 942.3         | 599.4     | 688.3        | 355.6 | 91.6   | 907    | 1110.0   | 302.3     | 83.8                         | 266.7      | 94.0   |              |                    |           |  |
| BH48455120       | 48" x 45" x 51" | Two Doors on Length | 47.6             | 44.6   | 51.0   | 44.3   | 41.3   | 44.1          | 30.6      | 27.1         | 14.0  | 230.0  | 2000   | 46.4     | 11.9      | 3.3                          | 10.5       | 3.7    | 1.5:1        | 52                 | 78        |  |
|                  | mm/kg/l         |                     | 1209.0           | 1132.8 | 1295.4 | 1125.2 | 1049.0 | 1120.1        | 777.2     | 688.3        | 355.6 | 104.3  | 907    | 1313.9   | 302.3     | 83.8                         | 266.7      | 94.0   |              |                    |           |  |

No-door boxes available. Visit [www.buckhorninc.com](http://www.buckhorninc.com) for more information.



Capacity is dependent upon application and use environment. It is based on equally distributed loads. Elevated temperatures or concentrated loads may affect capacity. Check with Buckhorn for suitability in your application. Specifications subject to change without notice. All dimensions are approximate.



BH48402520



BH48403420



BH48452520

## Extended Length Boxes

**Capacity: 2,000 lbs.**

Buckhorn's Extended Length Bulk Boxes are rated for load capacities up to 2,000 lbs. They are ideal for products such as automotive trim parts, hoses, pipes, harnesses and other long items. They collapse flat in seconds and stack for storage and return shipment – optimizing space usage and saving money on returned freight. Hand-hold areas on the panels provide a comfortable grip for assembling and collapsing the containers.

### Features and Benefits

- Footprints: 57" x 48", 62" x 48", 64" x 48", and 70" x 48"
- 62" length designed for maximum trailer cube utilization
- Spring action latches on doors and sidewalls provide quick and easy assembly, knock down and access to contents
- No hinge pins – walls snap in place and remove quickly for replacement
- Non-sequential folding allows quick collapsibility and prevents walls from bowing when collapsed
- Drop-doors and four-way forklift entry improve ergonomics and handling
- Optional steel corner hit plates
- Superior durability for reliable performance
- Customization and identification options available
- Backed by a one-year limited warranty
- 100% recyclable HDPE

### Options


- ID Tags
- Label Placards
- Cardholders
- Bar Coding
- Sequential Numbering
- Standard Colors

See p. 74-76 for more information.

### Compatible Components

| Bulk Box        | Lid        | Dolly |
|-----------------|------------|-------|
| 57" x 48" Boxes | TV57480200 | --    |
| 64" x 48" Boxes | TV64480200 | --    |
| 70" x 48" Boxes | TV70480200 | --    |

See p. 26 for more information.



The usable height allows for a 1" nest if another container is placed on top. Capacity is dependent upon application and use environment. Capacity is also based on equally distributed loads. Elevated temperatures or concentrated loads may affect capacity. Check with Buckhorn for suitability in your application. Specifications subject to change without notice. **All dimensions are approximate.**

## Extended Length Specifications

| Model No.        | Footprint       | Description                             | Dimensions (in.) |        |        |        |        |               |           |                     |       |                      |       | Weight |        | Capacity |           | Fork Tunnel Dimensions (in.) |            |        |              | Shipping           |           |  |
|------------------|-----------------|---|------------------|--------|--------|--------|--------|---------------|-----------|---------------------|-------|----------------------|-------|--------|--------|----------|-----------|------------------------------|------------|--------|--------------|--------------------|-----------|--|
|                  |                 |   | Outside          |        |        | Inside |        |               | Collapsed | Door Opening (Long) |       | Door Opening (Short) |       | Tare   | Weight | Volume   | Long Side |                              | Short Side |        | Return Ratio | Truck Capacity 53' |           |  |
|                  |                 |   | L" (A)           | W" (B) | H" (C) | L" (D) | W" (E) | Usable H" (F) | H"        | L"                  | D"    | L"                   | D"    | lbs.   | lbs.   | cu. ft.  | W" (G)    | H" (H)                       | W" (I)     | H" (J) |              | Opened             | Collapsed |  |
| <b>57" x 48"</b> |                 |   |                  |        |        |        |        |               |           |                     |       |                      |       |        |        |          |           |                              |            |        |              |                    |           |  |
| BS57482502       | 57" x 48" x 25" | Two Doors on Width                      | 57.3             | 48.0   | 25.0   | 53.5   | 44.5   | 17.6          | 13.9      | --                  | --    | 32.0                 | 8.5   | 153.7  | 2000   | 24.3     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 88                 | 168       |  |
|                  | mm/kg/l         |   | 1455.4           | 1219.2 | 635.0  | 1358.9 | 1130.3 | 447.0         | 353.1     | --                  | --    | 812.8                | 215.9 | 69.7   | 907    | 688.1    | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS57482520       | 57" x 48" x 25" | Two Doors on Length                     | 57.3             | 48.0   | 25.0   | 53.5   | 44.5   | 17.6          | 13.9      | 32.0                | 8.5   | --                   | --    | 153.7  | 2000   | 24.3     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 88                 | 168       |  |
|                  |                 |   | 1455.4           | 1219.2 | 635.0  | 1358.9 | 1130.3 | 447.0         | 353.1     | 812.8               | 215.9 | --                   | --    | 69.7   | 907    | 688.1    | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS57482522       | 57" x 48" x 25" | Two Doors on Length, Two Doors on Width | 57.3             | 48.0   | 25.0   | 53.5   | 44.5   | 17.6          | 13.9      | 32.0                | 8.5   | 32.0                 | 8.5   | 153.7  | 2000   | 24.3     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 88                 | 168       |  |
|                  |                 |   | 1455.4           | 1219.2 | 635.0  | 1358.9 | 1130.3 | 447.0         | 353.1     | 812.8               | 215.9 | 812.8                | 215.9 | 69.7   | 907    | 688.1    | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS57483402       | 57" x 48" x 34" | Two Doors on Width                      | 57.3             | 48.0   | 34.0   | 53.5   | 44.5   | 26.6          | 13.9      | --                  | --    | 32.0                 | 16.5  | 171.0  | 2000   | 36.7     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.5:1        | 66                 | 168       |  |
|                  |                 |   | 1455.4           | 1219.2 | 863.6  | 1358.9 | 1130.3 | 675.6         | 353.1     | --                  | --    | 812.8                | 419.1 | 77.6   | 907    | 1039.2   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS57483420       | 57" x 48" x 34" | Two Doors on Length                     | 57.3             | 48.0   | 34.0   | 53.5   | 44.5   | 26.6          | 13.9      | 32.0                | 16.5  | --                   | --    | 171.0  | 2000   | 36.7     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.5:1        | 66                 | 168       |  |
|                  |                 |   | 1455.4           | 1219.2 | 863.6  | 1358.9 | 1130.3 | 675.6         | 353.1     | 812.8               | 419.1 | --                   | --    | 77.6   | 907    | 1039.2   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS57483422       | 57" x 48" x 34" | Two Doors on Length, Two Doors on Width | 57.3             | 48.0   | 34.0   | 53.5   | 44.5   | 26.6          | 13.9      | 32.0                | 16.5  | 32.0                 | 16.5  | 171.0  | 2000   | 36.7     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.5:1        | 66                 | 168       |  |
|                  |                 |   | 1455.4           | 1219.2 | 863.6  | 1358.9 | 1130.3 | 675.6         | 353.1     | 812.8               | 419.1 | 812.8                | 419.1 | 77.6   | 907    | 1039.2   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS57484402       | 57" x 48" x 44" | Two Doors on Width                      | 57.3             | 48.0   | 44.0   | 53.5   | 44.5   | 36.6          | 24.4      | --                  | --    | 32.0                 | 16.5  | 207.0  | 2000   | 50.4     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 44                 | 84        |  |
|                  |                 |   | 1455.4           | 1219.2 | 1117.6 | 1358.9 | 1130.3 | 929.6         | 619.8     | --                  | --    | 812.8                | 419.1 | 93.9   | 907    | 1427.2   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS57484420       | 57" x 48" x 44" | Two Doors on Length                     | 57.3             | 48.0   | 44.0   | 53.5   | 44.5   | 36.6          | 24.4      | 32.0                | 16.5  | --                   | --    | 207.0  | 2000   | 50.4     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 44                 | 84        |  |
|                  |                 |   | 1455.4           | 1219.2 | 1117.6 | 1358.9 | 1130.3 | 929.6         | 619.8     | 812.8               | 419.1 | --                   | --    | 93.9   | 907    | 1427.2   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS57484422       | 57" x 48" x 44" | Two Doors on Length, Two Doors on Width | 57.3             | 48.0   | 44.0   | 53.5   | 44.5   | 36.6          | 24.4      | 32.0                | 16.5  | 32.0                 | 16.5  | 207.0  | 2000   | 50.4     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 44                 | 84        |  |
|                  |                 |   | 1455.4           | 1219.2 | 1117.6 | 1358.9 | 1130.3 | 929.6         | 619.8     | 812.8               | 419.1 | 812.8                | 419.1 | 93.9   | 907    | 1427.2   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| <b>62" x 48"</b> |                 |   |                  |        |        |        |        |               |           |                     |       |                      |       |        |        |          |           |                              |            |        |              |                    |           |  |
| BS62483402       | 62" x 48" x 34" | Two Doors on Width                      | 62.5             | 48.0   | 34.0   | 58.8   | 44.5   | 26.6          | 13.9      | --                  | --    | 32.0                 | 16.5  | 175.0  | 2000   | 40.3     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.7:1        | 60                 | 160       |  |
|                  | mm/kg/l         |   | 1587.5           | 1219.2 | 863.6  | 1493.5 | 1130.3 | 675.6         | 353.1     | --                  | --    | 812.8                | 419.1 | 79.4   | 907    | 1141.2   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS62483420       | 62" x 48" x 34" | Two Doors on Length                     | 62.5             | 48.0   | 34.0   | 58.8   | 44.5   | 26.6          | 13.9      | 32.0                | 16.5  | --                   | --    | 175.0  | 2000   | 40.3     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.7:1        | 60                 | 160       |  |
|                  |                 |   | 1587.5           | 1219.2 | 863.6  | 1493.5 | 1130.3 | 675.6         | 353.1     | 812.8               | 419.1 | --                   | --    | 79.4   | 907    | 1141.2   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS62483422       | 62" x 48" x 34" | Two Doors on Length, Two Doors on Width | 62.5             | 48.0   | 34.0   | 58.8   | 44.5   | 26.6          | 13.9      | 32.0                | 16.5  | 32.0                 | 16.5  | 175.0  | 2000   | 40.3     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.7:1        | 60                 | 160       |  |
|                  |                 |   | 1587.5           | 1219.2 | 863.6  | 1493.5 | 1130.3 | 675.6         | 353.1     | 812.8               | 419.1 | 812.8                | 419.1 | 79.4   | 907    | 1141.2   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |

No-door boxes available. Visit [www.buckhorninc.com](http://www.buckhorninc.com) for more information.



BS5783422



BS64482502



BS70485022

**Extended Length Specifications *continued...***

| Model No.                     | Footprint       | Description                                | Dimensions (in.) |        |        |        |        |                  |                 |                        |       |                         |       | Weight       |                | Capacity          |           | Fork Tunnel Dimensions (in.) |            |        |                 | Shipping           |           |  |
|-------------------------------|-----------------|--|------------------|--------|--------|--------|--------|------------------|-----------------|------------------------|-------|-------------------------|-------|--------------|----------------|-------------------|-----------|------------------------------|------------|--------|-----------------|--------------------|-----------|--|
|                               |                 |  | Outside          |        |        | Inside |        |                  | Collapsed<br>H" | Door Opening<br>(Long) |       | Door Opening<br>(Short) |       | Tare<br>lbs. | Weight<br>lbs. | Volume<br>cu. ft. | Long Side |                              | Short Side |        | Return<br>Ratio | Truck Capacity 53' |           |  |
|                               |                 |  | L" (A)           | W" (B) | H" (C) | L" (D) | W" (E) | Usable<br>H" (F) |                 | L"                     | D"    | L"                      | D"    |              |                |                   | W" (G)    | H" (H)                       | W" (I)     | H" (J) |                 | Opened             | Collapsed |  |
| <b>62" x 48" Continued...</b> |                 |  |                  |        |        |        |        |                  |                 |                        |       |                         |       |              |                |                   |           |                              |            |        |                 |                    |           |  |
| BS62484402                    | 62" x 48" x 44" | Two Doors on Width                         | 62.5             | 48.0   | 44.0   | 58.8   | 44.5   | 36.6             | 24.4            | --                     | --    | 32.0                    | 16.5  | 219.0        | 2000           | 55.4              | 10.2      | 3.2                          | 10.8       | 3.2    | 2:1             | 40                 | 80        |  |
|                               | mm/kg/l         |  | 1587.5           | 1219.2 | 1117.6 | 1493.5 | 1130.3 | 929.6            | 619.8           | --                     | --    | 812.8                   | 419.1 | 99.3         | 907            | 1568.8            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS62484420                    | 62" x 48" x 44" | Two Doors on Length                        | 62.5             | 48.0   | 44.0   | 58.8   | 44.5   | 36.6             | 24.4            | 32.0                   | 16.5  | --                      | --    | 219.0        | 2000           | 55.4              | 10.2      | 3.2                          | 10.8       | 3.2    | 2:1             | 40                 | 80        |  |
|                               |                 |  | 1587.5           | 1219.2 | 1117.6 | 1493.5 | 1130.3 | 929.6            | 619.8           | 812.8                  | 419.1 | --                      | --    | 99.3         | 907            | 1568.8            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS62484422                    | 62" x 48" x 44" | Two Doors on Length,<br>Two Doors on Width | 62.5             | 48.0   | 44.0   | 58.8   | 44.5   | 36.6             | 24.4            | 32.0                   | 16.5  | 32.0                    | 16.5  | 219.0        | 2000           | 55.4              | 10.2      | 3.2                          | 10.8       | 3.2    | 2:1             | 40                 | 80        |  |
|                               |                 |  | 1587.5           | 1219.2 | 1117.6 | 1493.5 | 1130.3 | 929.6            | 619.8           | 812.8                  | 419.1 | 812.8                   | 419.1 | 99.3         | 907            | 1568.8            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS62485002                    | 62" x 48" x 50" | Two Doors on Width                         | 62.5             | 48.0   | 50.0   | 58.8   | 44.5   | 42.6             | 24.4            | --                     | --    | 32.0                    | 16.5  | 238.0        | 2000           | 64.5              | 10.2      | 3.2                          | 10.8       | 3.2    | 2:1             | 40                 | 80        |  |
|                               |                 |  | 1587.5           | 1219.2 | 1270.0 | 1493.5 | 1130.3 | 1082.0           | 619.8           | --                     | --    | 812.8                   | 419.1 | 108.0        | 907            | 1826.4            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS62485020                    | 62" x 48" x 50" | Two Doors on Length                        | 62.5             | 48.0   | 50.0   | 58.8   | 44.5   | 42.6             | 24.4            | 32.0                   | 16.5  | --                      | --    | 238.0        | 2000           | 64.5              | 10.2      | 3.2                          | 10.8       | 3.2    | 2:1             | 40                 | 80        |  |
|                               |                 |  | 1587.5           | 1219.2 | 1270.0 | 1493.5 | 1130.3 | 1082.0           | 619.8           | 812.8                  | 419.1 | --                      | --    | 108.0        | 907            | 1826.4            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS62485022                    | 62" x 48" x 50" | Two Doors on Length,<br>Two Doors on Width | 62.5             | 48.0   | 50.0   | 58.8   | 44.5   | 42.6             | 24.4            | 32.0                   | 16.5  | 32.0                    | 16.5  | 238.0        | 2000           | 64.5              | 10.2      | 3.2                          | 10.8       | 3.2    | 2:1             | 40                 | 80        |  |
|                               |                 |  | 1587.5           | 1219.2 | 1270.0 | 1493.5 | 1130.3 | 1082.0           | 619.8           | 812.8                  | 419.1 | 812.8                   | 419.1 | 108.0        | 907            | 1826.4            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| <b>64" x 48"</b>              |                 |  |                  |        |        |        |        |                  |                 |                        |       |                         |       |              |                |                   |           |                              |            |        |                 |                    |           |  |
| BS64482502                    | 64" x 48" x 25" | Two Doors on Width                         | 64.5             | 48.0   | 25.0   | 60.8   | 44.5   | 17.6             | 13.9            | --                     | --    | 32.0                    | 8.5   | 157.0        | 2000           | 27.6              | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1           | 76                 | 152       |  |
|                               | mm/kg/l         |  | 1638.3           | 1219.2 | 635.0  | 1544.3 | 1130.3 | 447.0            | 353.1           | --                     | --    | 812.8                   | 215.9 | 71.2         | 907            | 781.5             | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS64482520                    | 64" x 48" x 25" | Two Doors on Length                        | 64.5             | 48.0   | 25.0   | 60.8   | 44.5   | 17.6             | 13.9            | 40.0                   | 11.0  | --                      | --    | 157.0        | 2000           | 27.6              | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1           | 76                 | 152       |  |
|                               |                 |  | 1638.3           | 1219.2 | 635.0  | 1544.3 | 1130.3 | 447.0            | 353.1           | 1016.0                 | 279.4 | --                      | --    | 71.2         | 907            | 781.5             | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS64482522                    | 64" x 48" x 25" | Two Doors on Length,<br>Two Doors on Width | 64.5             | 48.0   | 25.0   | 60.8   | 44.5   | 17.6             | 13.9            | 40.0                   | 11.0  | 32.0                    | 8.5   | 157.0        | 2000           | 27.6              | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1           | 76                 | 152       |  |
|                               |                 |  | 1638.3           | 1219.2 | 635.0  | 1544.3 | 1130.3 | 447.0            | 353.1           | 1016.0                 | 279.4 | 812.8                   | 215.9 | 71.2         | 907            | 781.5             | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS64483402                    | 64" x 48" x 34" | Two Doors on Width                         | 64.5             | 48.0   | 34.0   | 60.8   | 44.5   | 26.6             | 13.9            | --                     | --    | 32.0                    | 16.5  | 183.0        | 2000           | 41.7              | 10.2      | 3.2                          | 10.8       | 3.2    | 2.5:1           | 57                 | 152       |  |
|                               |                 |  | 1638.3           | 1219.2 | 863.6  | 1544.3 | 1130.3 | 675.6            | 353.1           | --                     | --    | 812.8                   | 419.1 | 83.0         | 907            | 1180.8            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS64483420                    | 64" x 48" x 34" | Two Doors on Length                        | 64.5             | 48.0   | 34.0   | 60.8   | 44.5   | 26.6             | 13.9            | 40.0                   | 16.5  | --                      | --    | 183.0        | 2000           | 41.7              | 10.2      | 3.2                          | 10.8       | 3.2    | 2.5:1           | 57                 | 152       |  |
|                               |                 |  | 1638.3           | 1219.2 | 863.6  | 1544.3 | 1130.3 | 675.6            | 353.1           | 1016.0                 | 419.1 | --                      | --    | 83.0         | 907            | 1180.8            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS64483422                    | 64" x 48" x 34" | Two Doors on Length,<br>Two Doors on Width | 64.5             | 48.0   | 34.0   | 60.8   | 44.5   | 26.6             | 13.9            | 40.0                   | 16.5  | 32.0                    | 16.5  | 183.0        | 2000           | 41.7              | 10.2      | 3.2                          | 10.8       | 3.2    | 2.5:1           | 57                 | 152       |  |
|                               |                 |  | 1638.3           | 1219.2 | 863.6  | 1544.3 | 1130.3 | 675.6            | 353.1           | 1016.0                 | 419.1 | 812.8                   | 419.1 | 83.0         | 907            | 1180.8            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS64484402                    | 64" x 48" x 44" | Two Doors on Width                         | 64.5             | 48.0   | 44.0   | 60.8   | 44.5   | 36.6             | 24.4            | --                     | --    | 32.0                    | 16.5  | 210.0        | 2000           | 57.3              | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1           | 38                 | 76        |  |
|                               |                 |  | 1638.3           | 1219.2 | 1117.6 | 1544.3 | 1130.3 | 929.6            | 619.8           | --                     | --    | 812.8                   | 419.1 | 95.3         | 907            | 1622.6            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS64484420                    | 64" x 48" x 44" | Two Doors on Length                        | 64.5             | 48.0   | 44.0   | 60.8   | 44.5   | 36.6             | 24.4            | 40.0                   | 16.5  | --                      | --    | 210.0        | 2000           | 57.3              | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1           | 38                 | 76        |  |
|                               |                 |  | 1638.3           | 1219.2 | 1117.6 | 1544.3 | 1130.3 | 929.6            | 619.8           | 1016.0                 | 419.1 | --                      | --    | 95.3         | 907            | 1622.6            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |
| BS64484422                    | 64" x 48" x 44" | Two Doors on Length,<br>Two Doors on Width | 64.5             | 48.0   | 44.0   | 60.8   | 44.5   | 36.6             | 24.4            | 40.0                   | 16.5  | 32.0                    | 16.5  | 210.0        | 2000           | 57.3              | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1           | 38                 | 76        |  |
|                               |                 |  | 1638.3           | 1219.2 | 1117.6 | 1544.3 | 1130.3 | 929.6            | 619.8           | 1016.0                 | 419.1 | 812.8                   | 419.1 | 95.3         | 907            | 1622.6            | 259.1     | 81.3                         | 274.3      | 81.3   |                 |                    |           |  |

## Extended Length Specifications *continued...*

| Model No.                     | Footprint       | Description                                | Dimensions (in.) |        |        |        |        |               |           |                     |       |                      |       | Weight |        | Capacity |           | Fork Tunnel Dimensions (in.) |            |        |              | Shipping           |           |  |
|-------------------------------|-----------------|--|------------------|--------|--------|--------|--------|---------------|-----------|---------------------|-------|----------------------|-------|--------|--------|----------|-----------|------------------------------|------------|--------|--------------|--------------------|-----------|--|
|                               |                 |  | Outside          |        |        | Inside |        |               | Collapsed | Door Opening (Long) |       | Door Opening (Short) |       | Tare   | Weight | Volume   | Long Side |                              | Short Side |        | Return Ratio | Truck Capacity 53' |           |  |
|                               |                 |  | L" (A)           | W" (B) | H" (C) | L" (D) | W" (E) | Usable H" (F) | H"        | L"                  | D"    | L"                   | D"    | lbs.   | lbs.   | cu. ft.  | W" (G)    | H" (H)                       | W" (I)     | H" (J) |              | Opened             | Collapsed |  |
| <b>64" x 48" Continued...</b> |                 |  |                  |        |        |        |        |               |           |                     |       |                      |       |        |        |          |           |                              |            |        |              |                    |           |  |
| BS64485002                    | 64" x 48" x 50" | Two Doors on Width                         | 64.5             | 48.0   | 50.0   | 60.8   | 44.5   | 42.6          | 24.4      | --                  | --    | 32.0                 | 22.5  | 234.0  | 2000   | 66.7     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.1:1        | 38                 | 76        |  |
|                               | mm/kg/l         |  | 1638.3           | 1219.2 | 1270.0 | 1544.3 | 1130.3 | 1082.0        | 619.8     | --                  | --    | 812.8                | 571.5 | 106.1  | 907    | 1888.7   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS64485020                    | 64" x 48" x 50" | Two Doors on Length                        | 64.5             | 48.0   | 50.0   | 60.8   | 44.5   | 42.6          | 24.4      | 40.0                | 24.5  | --                   | --    | 234.0  | 2000   | 66.7     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.1:1        | 38                 | 76        |  |
|                               |                 |  | 1638.3           | 1219.2 | 1270.0 | 1544.3 | 1130.3 | 1082.0        | 619.8     | 1016.0              | 622.3 | --                   | --    | 106.1  | 907    | 1888.7   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS64485022                    | 64" x 48" x 50" | Two Doors on Length,<br>Two Doors on Width | 64.5             | 48.0   | 50.0   | 60.8   | 44.5   | 42.6          | 24.4      | 40.0                | 24.5  | 32.0                 | 22.5  | 234.0  | 2000   | 66.7     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.1:1        | 38                 | 76        |  |
|                               |                 |  | 1638.3           | 1219.2 | 1270.0 | 1544.3 | 1130.3 | 1082.0        | 619.8     | 1016.0              | 622.3 | 812.8                | 571.5 | 106.1  | 907    | 1888.7   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| <b>70" x 48"</b>              |                 |  |                  |        |        |        |        |               |           |                     |       |                      |       |        |        |          |           |                              |            |        |              |                    |           |  |
| BS70482502                    | 70" x 48" x 25" | Two Doors on Width                         | 70.0             | 48.0   | 25.0   | 66.3   | 44.5   | 17.6          | 13.9      | --                  | --    | 32.0                 | 8.5   | 172.0  | 2000   | 30.1     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 68                 | 136       |  |
|                               | mm/kg/l         |  | 1778.0           | 1219.2 | 635.0  | 1684.0 | 1130.3 | 447.0         | 353.1     | --                  | --    | 812.8                | 215.9 | 78.0   | 907    | 852.3    | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS70482520                    | 70" x 48" x 25" | Two Doors on Length                        | 70.0             | 48.0   | 25.0   | 66.3   | 44.5   | 17.6          | 13.9      | 40.0                | 11.0  | --                   | --    | 172.0  | 2000   | 30.1     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 68                 | 136       |  |
|                               |                 |  | 1778.0           | 1219.2 | 635.0  | 1684.0 | 1130.3 | 447.0         | 353.1     | 1016.0              | 279.4 | --                   | --    | 78.0   | 907    | 852.3    | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS70482522                    | 70" x 48" x 25" | Two Doors on Length,<br>Two Doors on Width | 70.0             | 48.0   | 25.0   | 66.3   | 44.5   | 17.6          | 13.9      | 40.0                | 11.0  | 32.0                 | 8.5   | 172.0  | 2000   | 30.1     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 68                 | 136       |  |
|                               |                 |  | 1778.0           | 1219.2 | 635.0  | 1684.0 | 1130.3 | 447.0         | 353.1     | 1016.0              | 279.4 | 812.8                | 215.9 | 78.0   | 907    | 852.3    | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS70483402                    | 70" x 48" x 34" | Two Doors on Width                         | 70.0             | 48.0   | 34.0   | 66.3   | 44.5   | 26.6          | 13.9      | --                  | --    | 32.0                 | 16.5  | 195.0  | 2000   | 45       | 10.2      | 3.2                          | 10.8       | 3.2    | 2.5:1        | 51                 | 136       |  |
|                               |                 |  | 1778.0           | 1219.2 | 863.6  | 1684.0 | 1130.3 | 675.6         | 353.1     | --                  | --    | 812.8                | 419.1 | 88.5   | 907    | 1286     | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS70483420                    | 70" x 48" x 34" | Two Doors on Length                        | 70.0             | 48.0   | 34.0   | 66.3   | 44.5   | 26.6          | 13.9      | 40.0                | 16.5  | --                   | --    | 195.0  | 2000   | 45.4     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.5:1        | 51                 | 136       |  |
|                               |                 |  | 1778.0           | 1219.2 | 863.6  | 1684.0 | 1130.3 | 675.6         | 353.1     | 1016.0              | 419.1 | --                   | --    | 88.5   | 907    | 1285.6   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS70483422                    | 70" x 48" x 34" | Two Doors on Length,<br>Two Doors on Width | 70.0             | 48.0   | 34.0   | 66.3   | 44.5   | 26.6          | 13.9      | 40.0                | 16.5  | 32.0                 | 16.5  | 195.0  | 2000   | 45.4     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.5:1        | 51                 | 136       |  |
|                               |                 |  | 1778.0           | 1219.2 | 863.6  | 1684.0 | 1130.3 | 675.6         | 353.1     | 1016.0              | 419.1 | 812.8                | 419.1 | 88.5   | 907    | 1285.6   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS70484402                    | 70" x 48" x 44" | Two Doors on Width                         | 70.0             | 48.0   | 44.0   | 66.3   | 44.5   | 36.6          | 24.4      | --                  | --    | 32.0                 | 16.5  | 221.0  | 2000   | 62.5     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 34                 | 68        |  |
|                               |                 |  | 1778.0           | 1219.2 | 1117.6 | 1684.0 | 1130.3 | 929.6         | 619.8     | --                  | --    | 812.8                | 419.1 | 100.2  | 907    | 1769.8   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS70484420                    | 70" x 48" x 44" | Two Doors on Length                        | 70.0             | 48.0   | 44.0   | 66.3   | 44.5   | 36.6          | 24.4      | 40.0                | 16.5  | --                   | --    | 221.0  | 2000   | 62.5     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 34                 | 68        |  |
|                               |                 |  | 1778.0           | 1219.2 | 1117.6 | 1684.0 | 1130.3 | 929.6         | 619.8     | 1016.0              | 419.1 | --                   | --    | 100.2  | 907    | 1769.8   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS70484422                    | 70" x 48" x 44" | Two Doors on Length,<br>Two Doors on Width | 70.0             | 48.0   | 44.0   | 66.3   | 44.5   | 36.6          | 24.4      | 40.0                | 16.5  | 32.0                 | 16.5  | 221.0  | 2000   | 62.5     | 10.2      | 3.2                          | 10.8       | 3.2    | 1.8:1        | 34                 | 68        |  |
|                               |                 |  | 1778.0           | 1219.2 | 1117.6 | 1684.0 | 1130.3 | 929.6         | 619.8     | 1016.0              | 419.1 | 812.8                | 419.1 | 100.2  | 907    | 1769.8   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS70485002                    | 70" x 48" x 50" | Two Doors on Width                         | 70.0             | 48.0   | 50.0   | 66.3   | 44.5   | 42.6          | 24.4      | --                  | --    | 32.0                 | 22.5  | 248.0  | 2000   | 72.8     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.1:1        | 34                 | 68        |  |
|                               |                 |  | 1778.0           | 1219.2 | 1270.0 | 1684.0 | 1130.3 | 1082.0        | 619.8     | --                  | --    | 812.8                | 571.5 | 112.5  | 907    | 2061.5   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS70485020                    | 70" x 48" x 50" | Two Doors on Length                        | 70.0             | 48.0   | 50.0   | 66.3   | 44.5   | 42.6          | 24.4      | 40.0                | 24.5  | --                   | --    | 248.0  | 2000   | 72.8     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.1:1        | 34                 | 68        |  |
|                               |                 |  | 1778.0           | 1219.2 | 1270.0 | 1684.0 | 1130.3 | 1082.0        | 619.8     | 1016.0              | 622.3 | --                   | --    | 112.5  | 907    | 2061.5   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |
| BS70485022                    | 70" x 48" x 50" | Two Doors on Length,<br>Two Doors on Width | 70.0             | 48.0   | 50.0   | 66.3   | 44.5   | 42.6          | 24.4      | 40.0                | 24.5  | 32.0                 | 22.5  | 248.0  | 2000   | 72.8     | 10.2      | 3.2                          | 10.8       | 3.2    | 2.1:1        | 34                 | 68        |  |
|                               |                 |  | 1778.0           | 1219.2 | 1270.0 | 1684.0 | 1130.3 | 1082.0        | 619.8     | 1016.0              | 622.3 | 812.8                | 571.5 | 112.5  | 907    | 2061.5   | 259.1     | 81.3                         | 274.3      | 81.3   |              |                    |           |  |



## DunnageReady Specifications

| Model No.        | Footprint       | Description        | Dimensions (in.) |        |        |                       |        |           |                      |        |           | Fork Tunnel Dimensions (in.) |        |            |        | Shipping           |        |
|------------------|-----------------|--------------------|------------------|--------|--------|-----------------------|--------|-----------|----------------------|--------|-----------|------------------------------|--------|------------|--------|--------------------|--------|
|                  |                 |                    | Outside          |        |        | Inside w/ Length Open |        |           | Inside w/ Width Open |        |           | Long Side                    |        | Short Side |        | Truck Capacity 53' |        |
|                  |                 |                    | L"               | W"     | H"     | L"                    | W"     | Usable H" | L"                   | W"     | Usable H" | W" (G)                       | H" (H) | W" (I)     | H" (J) | Return Ratio       | Opened |
| <b>48" x 45"</b> |                 |                    |                  |        |        |                       |        |           |                      |        |           |                              |        |            |        |                    |        |
| BX484544         | 48" x 45" x 44" | Open Side Bulk Box | 48.0             | 45.0   | 44.0   | 43.8                  | 41.5   | 37.0      | 44.5                 | 40.8   | 37.0      | 11.6                         | 3.3    | 11.9       | 3.4    | 1:1                | 52     |
|                  | mm/kg/l         |                    | 1219.2           | 1143.0 | 1117.6 | 1112.5                | 1054.1 | 939.8     | 1130.3               | 1036.3 | 939.8     | 294.6                        | 83.7   | 302.3      | 86.4   |                    |        |
| BX484550         | 48" x 45" x 50" | Open Side Bulk Box | 48.0             | 45.0   | 50.0   | 43.8                  | 41.5   | 43.0      | 44.5                 | 40.8   | 43.0      | 11.6                         | 3.3    | 11.9       | 3.4    | 1:1                | 52     |
|                  |                 |                    | 1219.2           | 1143.0 | 1270.0 | 1112.5                | 1054.1 | 1092.2    | 1130.3               | 1036.3 | 1092.2    | 294.6                        | 83.7   | 302.3      | 86.4   |                    |        |
| <b>57" x 48"</b> |                 |                    |                  |        |        |                       |        |           |                      |        |           |                              |        |            |        |                    |        |
| BS574834         | 57" x 48" x 34" | Open Side Bulk Box | 57.3             | 48.0   | 34.0   | 52.8                  | 44.5   | 26.6      | 53.5                 | 43.8   | 26.6      | 10.2                         | 3.2    | 10.8       | 3.2    | 1:1                | 66     |
|                  | mm/kg/l         |                    | 1455.4           | 1219.2 | 863.6  | 1341.1                | 1130.3 | 675.6     | 1358.9               | 1112.5 | 675.6     | 259.1                        | 81.3   | 274.3      | 81.3   |                    |        |
| BS574844         | 57" x 48" x 34" | Open Side Bulk Box | 57.3             | 48.0   | 44.0   | 52.8                  | 44.5   | 36.6      | 53.5                 | 43.8   | 36.6      | 10.2                         | 3.2    | 10.8       | 3.2    | 1:1                | 44     |
|                  |                 |                    | 1455.4           | 1219.2 | 1117.6 | 1341.1                | 1130.3 | 929.6     | 1358.9               | 1112.5 | 929.6     | 259.1                        | 81.3   | 274.3      | 81.3   |                    |        |
| <b>64" x 48"</b> |                 |                    |                  |        |        |                       |        |           |                      |        |           |                              |        |            |        |                    |        |
| BS644834         | 64" x 48" x 34" | Open Side Bulk Box | 64.5             | 48.0   | 34.0   | 60.1                  | 44.5   | 26.6      | 60.8                 | 43.8   | 26.6      | 10.2                         | 3.2    | 10.8       | 3.2    | 1:1                | 57     |
|                  | mm/kg/l         |                    | 1638.3           | 1219.2 | 863.6  | 1526.5                | 1130.3 | 675.6     | 1544.3               | 1112.5 | 675.6     | 259.1                        | 81.3   | 274.3      | 81.3   |                    |        |
| BS644844         | 64" x 48" x 44" | Open Side Bulk Box | 64.5             | 48.0   | 44.0   | 60.1                  | 44.5   | 36.6      | 60.8                 | 43.8   | 36.6      | 10.2                         | 3.2    | 10.8       | 3.2    | 1:1                | 38     |
|                  |                 |                    | 1638.3           | 1219.2 | 1117.6 | 1526.5                | 1130.3 | 929.6     | 1544.3               | 1112.5 | 929.6     | 259.1                        | 81.3   | 274.3      | 81.3   |                    |        |
| BS644850         | 64" x 48" x 50" | Open Side Bulk Box | 64.5             | 48.0   | 50.0   | 60.1                  | 44.5   | 42.6      | 60.8                 | 43.8   | 42.6      | 10.2                         | 3.2    | 10.8       | 3.2    | 1:1                | 38     |
|                  |                 |                    | 1638.3           | 1219.2 | 1270.0 | 1526.5                | 1130.3 | 1082.0    | 1544.3               | 1112.5 | 1082.0    | 259.1                        | 81.3   | 274.3      | 81.3   |                    |        |

### Did You Know...?

Buckhorn's strategic partnerships match our customers' needs for interior dunnage with designers that are the best in the business. Working in conjunction with your Buckhorn packaging professional, these experts will analyze your products and system-wide requirements to help define your needs. They'll work with you to select and design the material that meets the specific demands of your application, ensuring the quality of your component parts as they are transported throughout the supply chain.



## Agricultural Boxes

**Capacity: 400-1,200 lbs.**

Harvesting to processing, distribution to retailing—Buckhorn’s Agricultural Bulk Boxes maintain freshness and safeguard fragile produce. BF models are stack only, while BG models are collapsible and feature an injection-molded base with structural foam sidewalls.

### Features and Benefits

- Footprints: 42" x 29", 48" x 40" or 48" x 44"
- Manufactured of FDA-approved materials
- Withstands exposure to sunlight and cooling processes; resists impact and moisture; will not splinter, rot or absorb odors
- Easy-to-clean interiors
- Reinforced sides for maximum strength, durability and secure stacking
- Available in solid or ventilated styles, depending on model
- Two-way or four-way entry options, depending on model
- Use with temperatures of -20° to 120° F
- Customization and identification options available
- Backed by a one-year limited warranty
- 100% recyclable HDPE

### Options


- Nine Feet or Five Plastic Runners (BG Boxes only)
- ID Tags
- Label Placards
- Cardholders
- Bar Coding
- Sequential Numbering
- Standard Colors

See p. 74-76 for more information.

## Compatible Components

| Bulk Box                       | Lid                    | Dolly      |
|--------------------------------|------------------------|------------|
| BG4840 Boxes with Nine Feet    | TG48400399, TS48400399 | DY48400900 |
| BG4840 Boxes with Five Runners | TG48400200, TS48400200 | DY48400900 |
| BF42292800                     | TL42290400             | —          |
| BF48442900                     | TL48440300             | —          |

See p. 26 for more information.

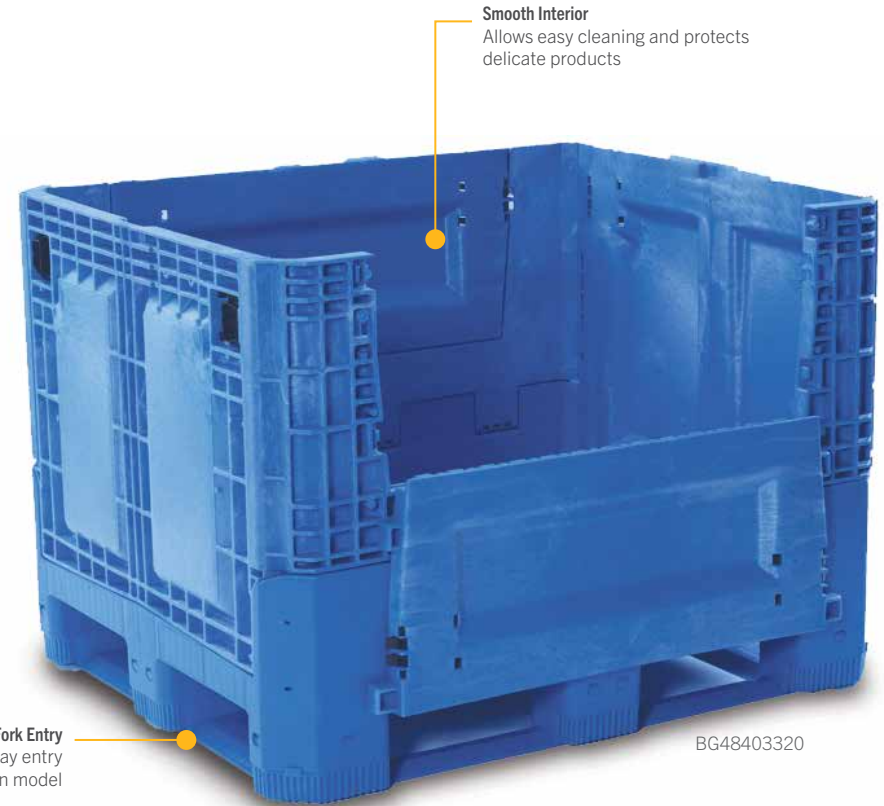


Distributed by:  
 Custom Equipment Company  
 866-333-0728  
 sales@custommhs.com  
 www.custommhs.com

## Agricultural Boxes Specifications

| Model No.                      | Footprint       | Description          | Dimensions (in.) |        |        |        |        |               |               |              |       | Weight Tare lbs. | Capacity    |         |         |           | Fork Tunnel Dimensions (in.) |            |        |              | Shipping           |           |  |
|--------------------------------|-----------------|----------------------|------------------|--------|--------|--------|--------|---------------|---------------|--------------|-------|------------------|-------------|---------|---------|-----------|------------------------------|------------|--------|--------------|--------------------|-----------|--|
|                                |                 |                      | Outside          |        |        | Inside |        |               | Col-lapsed H" | Door Opening |       |                  | Weight lbs. | Volume  |         | Long Side |                              | Short Side |        | Return Ratio | Truck Capacity 53' |           |  |
|                                |                 |                      | L" (A)           | W" (B) | H" (C) | L" (D) | W" (E) | Usable H" (F) |               | L"           | D"    |                  |             | Bushels | cu. ft. | L" (G)    | H" (H)                       | L" (I)     | H" (J) |              | Opened             | Collapsed |  |
| <b>Agricultural Bulk Boxes</b> |                 |                      |                  |        |        |        |        |               |               |              |       |                  |             |         |         |           |                              |            |        |              |                    |           |  |
| BG48403320                     | 48" x 40" x 33" | Two Doors on Length  | 48.0             | 40.0   | 33.0   | 45.0   | 37.0   | 27.0          | 15.3          | 33.5         | 14.1  | 129.0            | 1200        | 23.0    | 28.3    | 13.0      | 3.5                          | 12.0       | 3.5    | 2.2:1        | 90                 | 240       |  |
|                                | mm/kg/l         |                      | 1219.2           | 1016.0 | 838.2  | 1143.0 | 939.8  | 685.8         | 388.6         | 850.9        | 358.1 | 58.5             | 544         |         | 801.4   | 330.2     | 88.9                         | 304.8      | 88.9   |              |                    |           |  |
| BG48404602                     | 48" x 40" x 46" | Two Doors on Width   | 48.0             | 40.0   | 46.0   | 45.0   | 37.0   | 40.0          | 15.3          | 33.5         | 23.1  | 142.0            | 1200        | 33.5    | 38.5    | 13.0      | 3.5                          | 12.0       | 3.5    | 3.6:1        | 60                 | 240       |  |
|                                |                 |                      | 1219.2           | 1016.0 | 1168.4 | 1143.0 | 939.8  | 1016.0        | 388.6         | 850.9        | 586.7 | 64.4             | 544         |         | 1090.2  | 330.2     | 88.9                         | 304.8      | 88.9   |              |                    |           |  |
| BF42292800                     | 42" x 29" x 28" | Solid, No Drop Doors | 41.6             | 28.8   | 27.8   | 38.5   | 25.5   | 22.3          | -             | -            | -     | 74.0             | 900         | 11.1    | 13.8    | 10.5      | 3.9                          | -          | -      | 1:1          | 132                | -         |  |
|                                |                 |                      | 1061.7           | 731.5  | 706.1  | 977.9  | 647.7  | 566.4         | -             | -            | -     | 33.6             | 408         |         | 390.8   | 266.7     | 99.1                         | -          | -      |              |                    |           |  |
| BF48401622                     | 48" x 40" x 16" | Vent, No Drop Doors  | 48.1             | 40.0   | 16.1   | 44.5   | 36.5   | 10.5          | -             | -            | -     | 48.1             | 400         | 8.1     | 9.9     | 11.5      | 3.8                          | 11.6       | 3.8    | 1:1          | 180                | -         |  |
|                                |                 |                      | 1221.7           | 1016.0 | 408.9  | 1130.3 | 927.1  | 266.7         | -             | -            | -     | 21.8             | 181         |         | 286.0   | 292.1     | 96.5                         | 294.6      | 96.5   |              |                    |           |  |
| BF48442900                     | 48" x 44" x 29" | Solid, No Drop Doors | 48.0             | 44.0   | 29.4   | 45.4   | 41.4   | 23.4          | -             | -            | -     | 95.0             | 700         | 19.9    | 25.9    | 11.7      | 3.1                          | 11.7       | 4.3    | 1:1          | 84                 | -         |  |
|                                |                 |                      | 1219.2           | 1117.6 | 746.8  | 1153.2 | 1051.6 | 594.4         | -             | -            | -     | 43.1             | 318         |         | 733.4   | 297.2     | 78.7                         | 297.2      | 109.2  |              |                    |           |  |

No-door boxes available for BG models. Ventilated side panels and bases also available for BG boxes — minimum purchase required. Visit [www.buckhorninc.com](http://www.buckhorninc.com) for more information.



All heights are based on the version with nine feet. Add 1.5" for versions with five runners. Add 0.5" to fork tunnel height for versions with five runners. Capacity is dependent upon application and use environment. It is based on equally distributed loads. Elevated temperatures or concentrated loads may affect capacity. Truck capacity based on versions with nine feet. Call Buckhorn for versions with five runners. Check with Buckhorn for suitability in your application. Specifications subject to change without notice. **All dimensions are approximate.**



BF42292800

BF48401600

BF48442900

# Bulk Box Accessories

## Dolly Specifications

| Model No.               | Footprint      | Compatible Boxes                                | Dimensions (in.) |        |       | Weight Tare lbs. |
|-------------------------|----------------|---|------------------|--------|-------|------------------|
|                         |                |   | L"               | W"     | H"    |                  |
| <b>Bulk Box Dollies</b> |                |   |                  |        |       |                  |
| DY32300900              | 32" x 30" x 9" | BF3230, BN3230 and BS3230 Boxes                 | 33.6             | 31.5   | 9.0   | 62.0             |
|                         | mm/kg          |   | 853.4            | 800.1  | 228.6 | 28.1             |
| DY48400900              | 48" x 40" x 9" | BG4840, BH4840 and BI4840 Boxes                 | 48.5             | 40.5   | 9.0   | 46.0             |
|                         |                |   | 1231.9           | 1028.7 | 228.6 | 20.9             |
| DY48450900              | 48" x 45" x 9" | BE4845, BF4845, BH4845, BN4845 and BX4845 Boxes | 48.5             | 45.4   | 9.0   | 65.0             |
|                         |                |   | 1231.9           | 1153.2 | 228.6 | 29.5             |



DY32300900

## Lid Specifications

| Model No.            | Footprint      | Compatible Boxes                        | Dimensions (in.) |        |      | Weight Tare lbs. | Lid Type        |
|----------------------|----------------|---|------------------|--------|------|------------------|-----------------|
|                      |                |   | L"               | W"     | H"   |                  |                 |
| <b>Bulk Box Lids</b> |                |   |                  |        |      |                  |                 |
| TG48400200           | 48" x 40" x 2" | BG4840 Boxes with Five Runners          | 48.5             | 40.5   | 3.0  | 12.6             | Vacuum Formed   |
|                      | mm/kg          |   | 1231.9           | 1028.7 | 76.2 | 5.7              |                 |
| TH48400200           | 48" x 40" x 2" | BH4840 Boxes                            | 48.4             | 40.4   | 2.1  | 18.6             | Structural Foam |
|                      |                |   | 1229.4           | 1026.2 | 53.3 | 8.4              |                 |
| TH48450200           | 48" x 45" x 2" | BH4845 Boxes                            | 48.4             | 45.4   | 2.3  | 20.7             | Structural Foam |
|                      |                |   | 1229.4           | 1153.2 | 58.4 | 9.4              |                 |
| TL42290400           | 42" x 29" x 4" | BF42292800                              | 42.5             | 29.7   | 3.2  | 15.3             | Structural Foam |
|                      |                |   | 1079.5           | 754.4  | 81.3 | 6.9              |                 |
| TL48440300           | 48" x 44" x 3" | BF48442900                              | 48.9             | 44.8   | 2.8  | 20.9             | Structural Foam |
|                      |                |   | 1242.1           | 1137.9 | 71.1 | 9.5              |                 |
| TS32300200           | 32" x 30" x 2" | BF3230, BN3230 and BS3230 Boxes         | 32.8             | 30.8   | 2.3  | 10.3             | Structural Foam |
|                      |                |   | 833.1            | 782.3  | 58.4 | 4.7              |                 |
| TS48400200           | 48" x 40" x 2" | BG4840 Boxes with Five Runners          | 49.1             | 41.1   | 2.5  | 21.8             | Structural Foam |
|                      |                |   | 1247.1           | 1043.9 | 63.5 | 9.9              |                 |
| TS48400399           | 48" x 40" x 3" | BG4840 Boxes with Nine Feet             | 49.1             | 41.1   | 2.5  | 23.5             | Structural Foam |
|                      |                |   | 1247.1           | 1043.9 | 63.5 | 10.7             |                 |
| TS48450300           | 48" x 45" x 3" | BE4845, BF4845, BN4845 and BX4845 Boxes | 49.8             | 46.8   | 3.8  | 25.0             | Structural Foam |
|                      |                |   | 1264.9           | 1188.7 | 96.5 | 11.3             |                 |
| TV57480200           | 57" x 48" x 2" | BF5748 and BS5748 Boxes                 | 57.5             | 48.2   | 2.1  | 18.0             | Vacuum Formed   |
|                      |                |   | 1460.5           | 1224.3 | 53.3 | 8.2              |                 |
| TV64480200           | 64" x 48" x 2" | BF6448 and BS6448 Boxes                 | 64.8             | 48.2   | 2.1  | 21.0             | Vacuum Formed   |
|                      |                |   | 1644.7           | 1224.3 | 53.3 | 9.5              |                 |
| TV70480200           | 70" x 48" x 2" | BF7048 and BS7048 Boxes                 | 70.7             | 48.2   | 2.1  | 22.0             | Vacuum Formed   |
|                      |                |   | 1795.8           | 1224.3 | 53.3 | 10.0             |                 |




TG48400200



TH48450200



TS48400200



TS48450300



TV70480200