

# Container Tilters

## Stationary Container Tilters




SRT model shown.

Model Number	Tilt Capacity	Lowered Height	Degree of Tilt	Dimensions W/L	Fork Length	Lifting Speed	Shipping Weight
<b>SRT Series</b>							
SRT20	2000 lbs	3/8"	89°	33 x 58"	40"	23 sec	885 lbs
SRT40	4000 lbs	3/8"	89°	33 x 58"	40"	24 sec	900 lbs

### Features

- 2000 - 4000 lb capacity
- 89° tilt
- Internal 1 HP 115/1/60 power unit
- Push-button hand-held control with magnetic backing for mounting
- Optional foot-control available
- Compact frame design
- Designed to be lagged down to the floor
- Fork pockets allow for easy loading with a pallet jack or forklift
- Flexible safety toe guards on forks
- Custom designs available

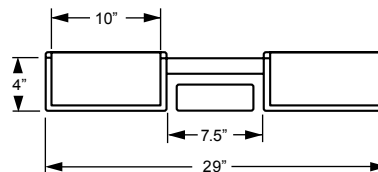

## Portable Container Tilters

Model Number	Tilt Capacity	Lowered Height	Degree of Tilt	Dimensions W/L	Fork Length	Fork O.D.	Lifting Speed	Shipping Weight
<b>PT Series - Non-Straddle</b>								
PT-20	2000 lbs	3-1/2"	89°	34 x 62"	42"	26-1/2"	26 sec	825 lbs
PT-40	4000 lbs	3-1/2"	89°	34 x 62"	42"	26-1/2"	30 sec	790 lbs
<b>PTS Series - 42" I.D. Straddle</b>								
PTS42-20	2000 lbs	3-1/2"	89°	48 x 62"	42"	26-1/2"	26 sec	865 lbs
PTS42-40	4000 lbs	3-1/2"	89°	48 x 62"	42"	26-1/2"	30 sec	885 lbs
<b>PTS Series - 50" I.D. Straddle</b>								
PTS50-20	2000 lbs	3-1/2"	89°	56 x 62"	42"	26-1/2"	26 sec	880 lbs
PTS50-40	4000 lbs	3-1/2"	89°	56 x 62"	42"	26-1/2"	30 sec	900 lbs



PT-20 model shown.

### Features

- 2000 - 4000 lb capacities
- 89° tilt
- Straddle models for pallets and containers
- Non-straddle models for skids and baskets
- Easy-to-service internal DC motor
- Optional 115V AC or air motors available
- Push-button control with magnetic backing
- External 10 amp battery charger
- Presto foot-operated floor lock
- 12V maintenance free, leak-proof AGM battery
- Push handle lowers when in use
- Custom designs available



PTS50-20 model shown.

**Distributed By: Custom Equipment Company**  
 866-333-0728 919-847-5765 fax  
 tom@custommhs.com www.custommhs.com